


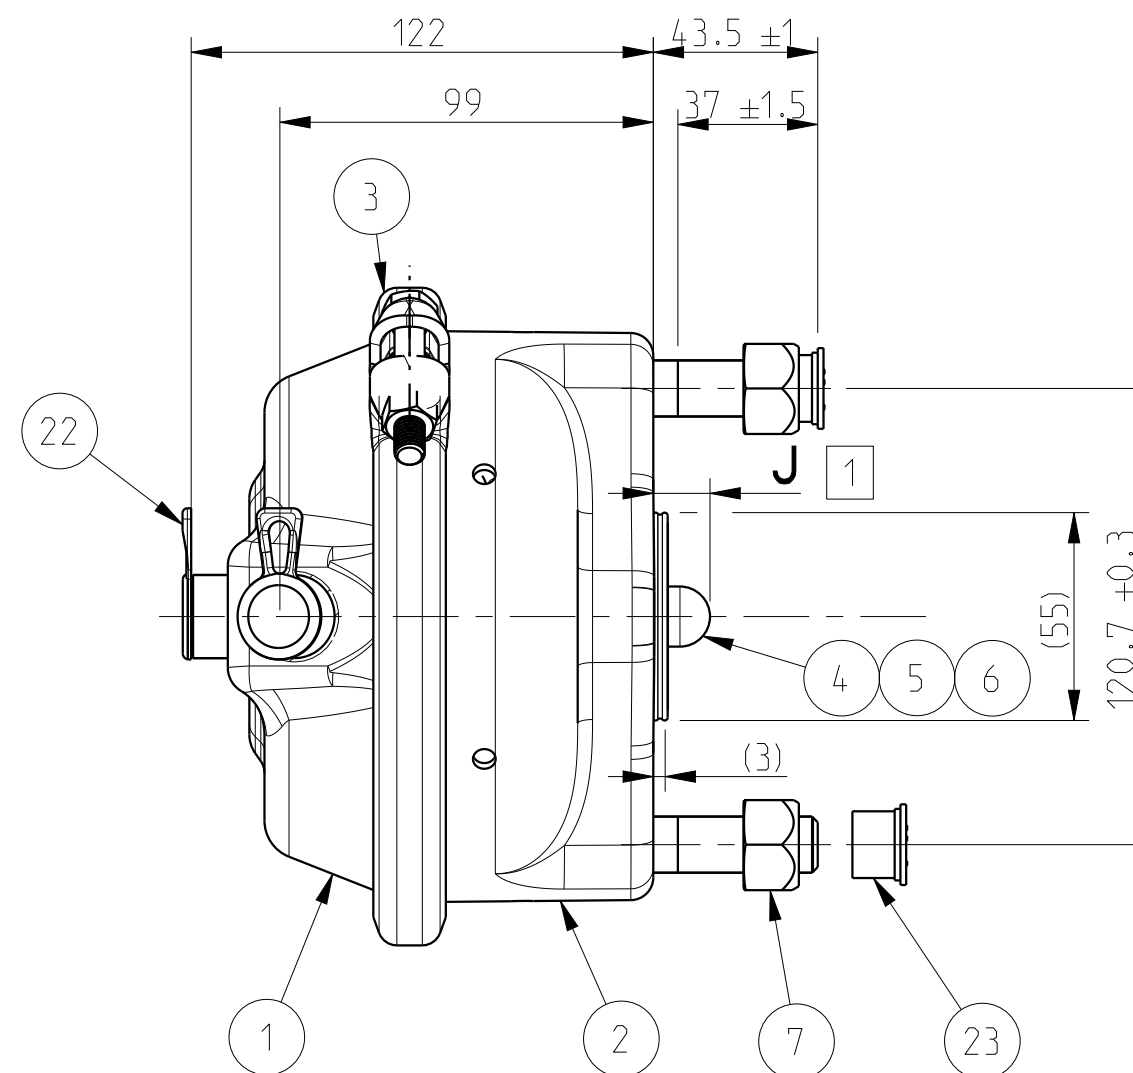
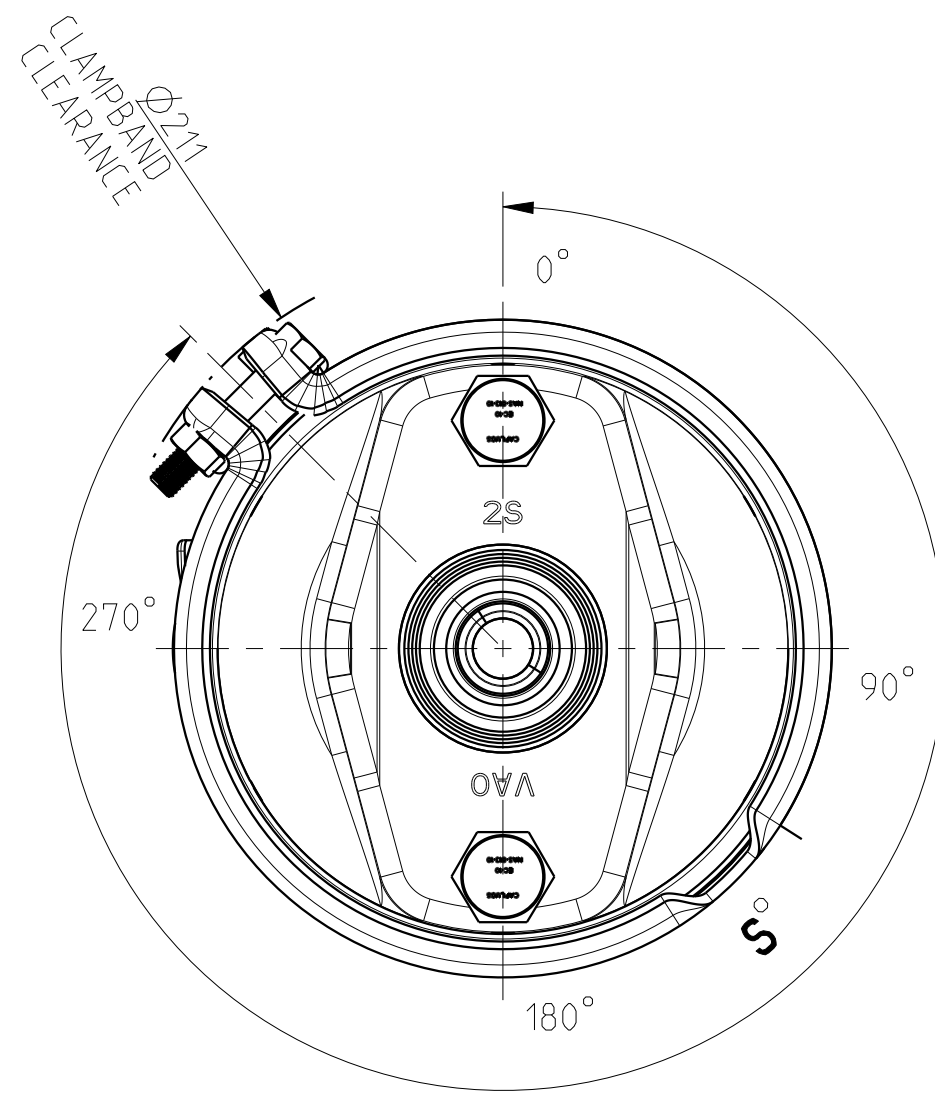


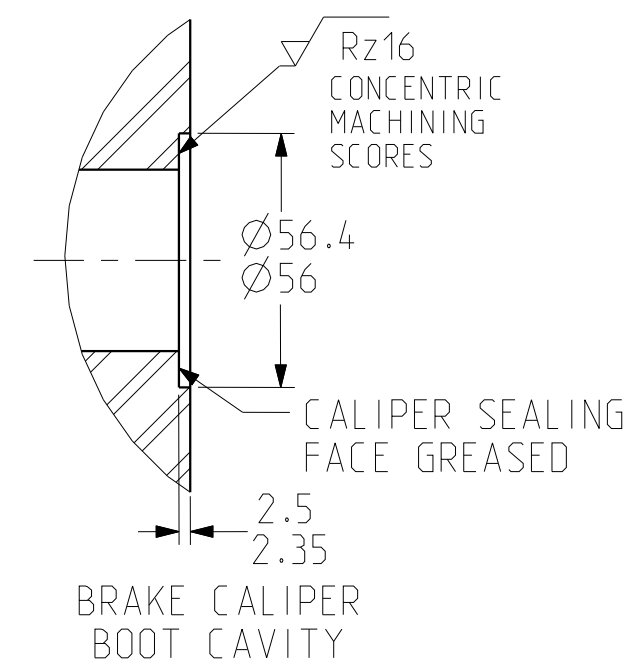

TORQUE TABLE	
ITEM	N m
M16 MOUNTING NUTS	180-210
M16 PORT FITTINGS	35-40

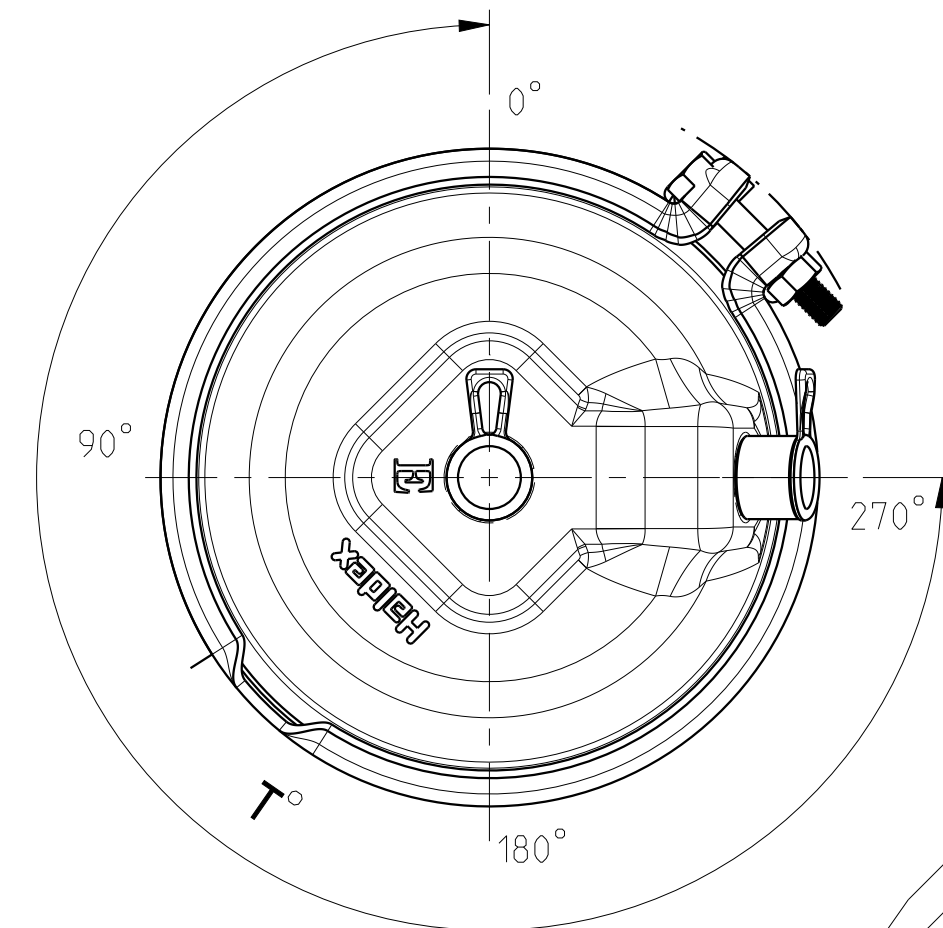

ACCORDING TO TÜV BC 0169

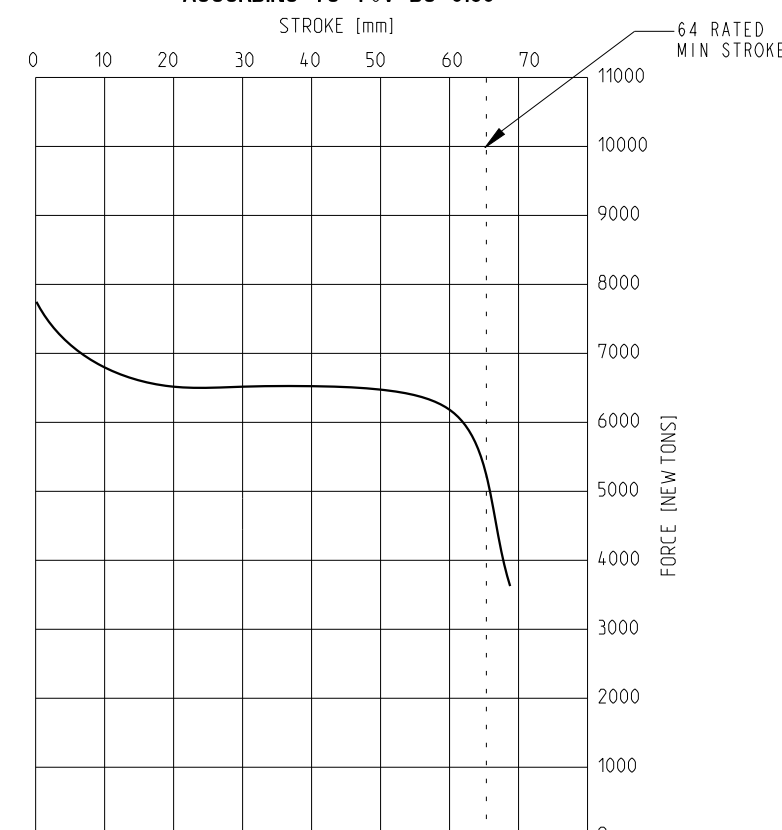

INTENDED FOR DISC BRAKE TRAILER APPLICATIONS WITH MAXIMUM 64MM STROKE

SERVICE CHAMBER: OPERATING PRESSURE: 8.5BAR
TEMPORARILY :10.2BAR

PISTON RETURN SPRING SERVICE SIDE, MINIMUM RETURN FORCE: 180 ± 30 N

ACTUATOR MAY BE INSTALLED ON THE VEHICLE WITH MOUNTING STUDS ORIENTED IN ANY POSITION


UNIT SHOWN IN BRAKE RELEASED POSITION

MISALIGNMENT OF THE PUSHROD IN ANY POSITION: 4°

1 DIMENSION IS WITH THE UNIT IN BRAKE RELEASED POSITION

[illegible]

C THIS DOCUMENT IS THE PROPERTY OF THE HALDEX GROUP, AND CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED, UTILIZED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION							
REV	CHANGE DESCRIPTION AND ORDER NUMBER			DATE	CHANGED	CHECKED	APPROVED
02	02352			2023-02-08	MN844	JG1031	JG1031

TOLERANCES UNLESS OTHERWISE SPECIFIED ISO 2768-v		DOC TYPE ASSEM	SCALE 1:2	MATERIAL		
 	THIS DOCUMENT USES SPECIAL CHARACTERISTICS AS DEFINED IN PROCEDURE HDX2-3-364		DRAWN MN844	DATE 2021-11-29	WEIGHT [ONLY FOR INFO.] 3.114 kg	DIMENSION IN mm DO NOT SCALE DRAWING
			CHECKED JG1031	DATE 2022-02-03	TITLE Service chamber Disc T-16	
HALDEX BRAKE PRODUCTS AB LANDSKRONA SWEDEN		APPROVED JG1031	DATE 2022-02-09	ITEM NUMBER 125160601	PROJECTION 	SHEET 1(1) FORMA A2

GENERIC MODEL (INFO ONLY): 125160601GENERIC
