

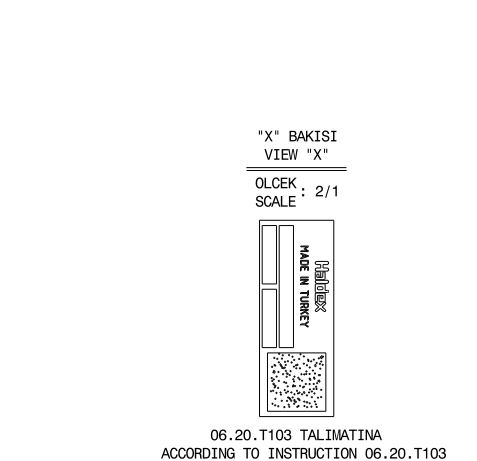
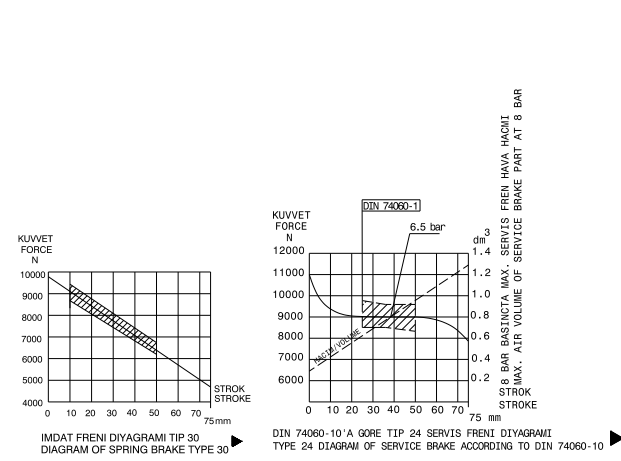
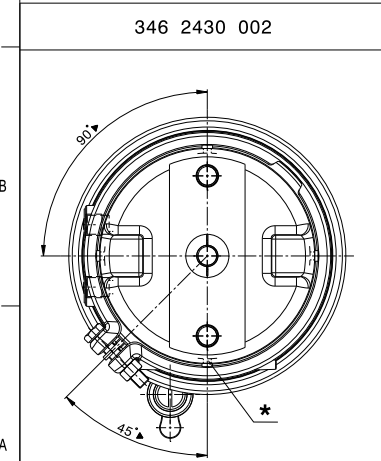


2 ANA RESIMDE ORTAK OLCULER VERILMISTIR, OZEL OLCULER ICIN GOSTERIMLERE VE TABLOYA BAKINIZ.
16 MAIN VIEWS SHOW COMMON DIMENSIONS ONLY,SEE REPRESENTATIONS AND TABLE FOR SPECIFIC DIMENSIONS.

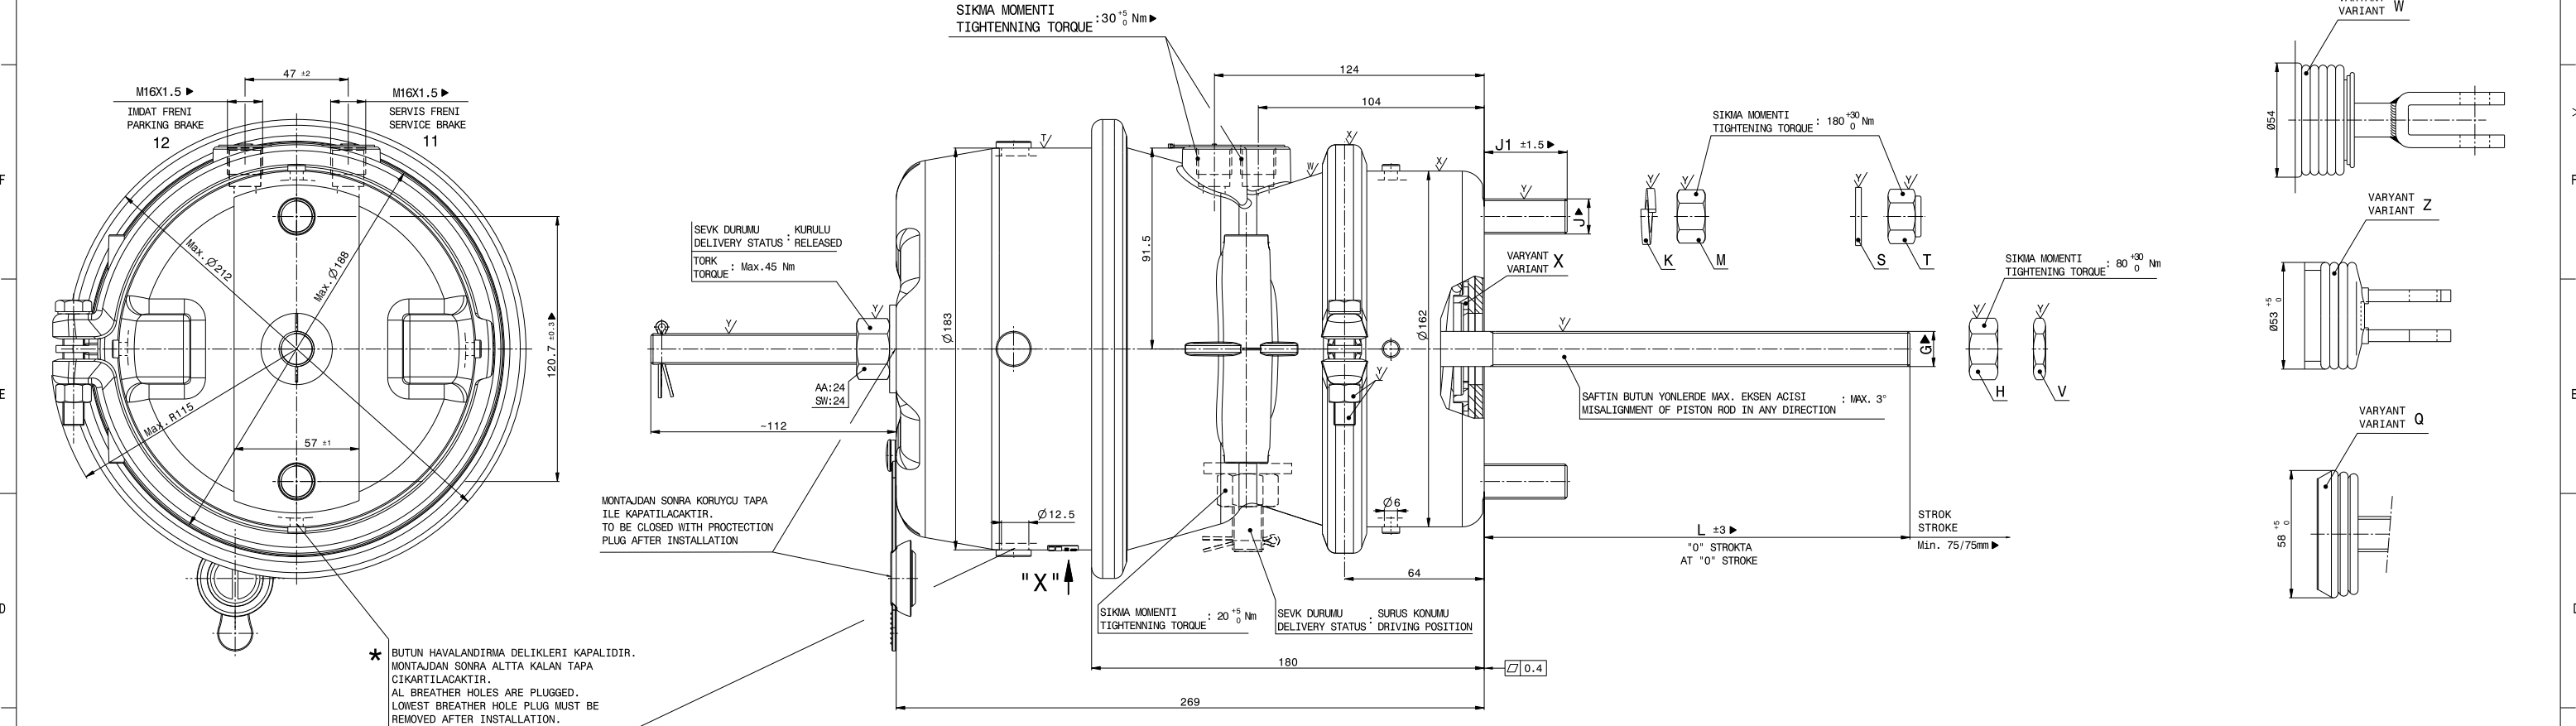

P/N	CEKTIRME TİPİ YOKE TYPE	ØZ	PİM TİPİ PIN TYPE	G	H	V	J	J1	K	M	S	T	VARYANT VARIANT	L	L1
346 2430 002	B	14	F1	M16X1.5	EVET/YES	HAYIR/NO	M16X1.5	38	HAYIR/NO	HAYIR/NO	EVET/YES	EVET/YES	X	-	245

07.01-T03'E GÖRE / ACCORDING TO 07.01-T03	MEDIA	AIR	NOTE : PERFORMANCE MEASUREMENTS SHOULD BE DONE AFTER CAGING THE SPRING CHAMBER FOR 24 HOURS MINIMUM.
CLASS : CF1D	OPERATING TEMPERATURE RANGE	-40°C + 80°C	
SPRING BRAKE RELEASE PRESSURE (AT "10 mm." STROKE)	MAXIMUM OPERATING PRESSURE	10 bar	
AIR VOLUME OF SPRING BRAKE PART	MAXIMUM PRESSURE (TEMPORARY)	13 bar	
FORCE OF RETURN SPRING AT 0 STROKE	PERMISSIBLE LEAKAGE	10 cm³ / min.	

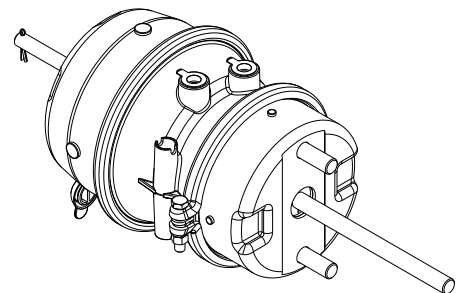

SYMBOL	CORROSION RESISTANCE
W	ARF08 - 2.1
X	ARF08 - 5.0
Y	ARF08 - 1.1
Z	ARF08 - 5.1 / ARF08 - 4.4

SYMBOL	CORROSION RESISTANCE
W	ARF08 - 2.1
X	ARF08 - 5.0
Y	ARF08 - 1.1
Z	ARF08 - 5.1 / ARF08 - 4.4