


2 ► ANA RESIMDE ORTAK OLCULER VERILMISTIR, OZEL OLCULER ICIN GOSTERIMLERE VE TABLOYA BAKINIZ.
16 ► MAIN VIEWS SHOW COMMON DIMENSIONS ONLY,SEE REPRESENTATIONS AND TABLE FOR SPECIFIC DIMENSIONS.

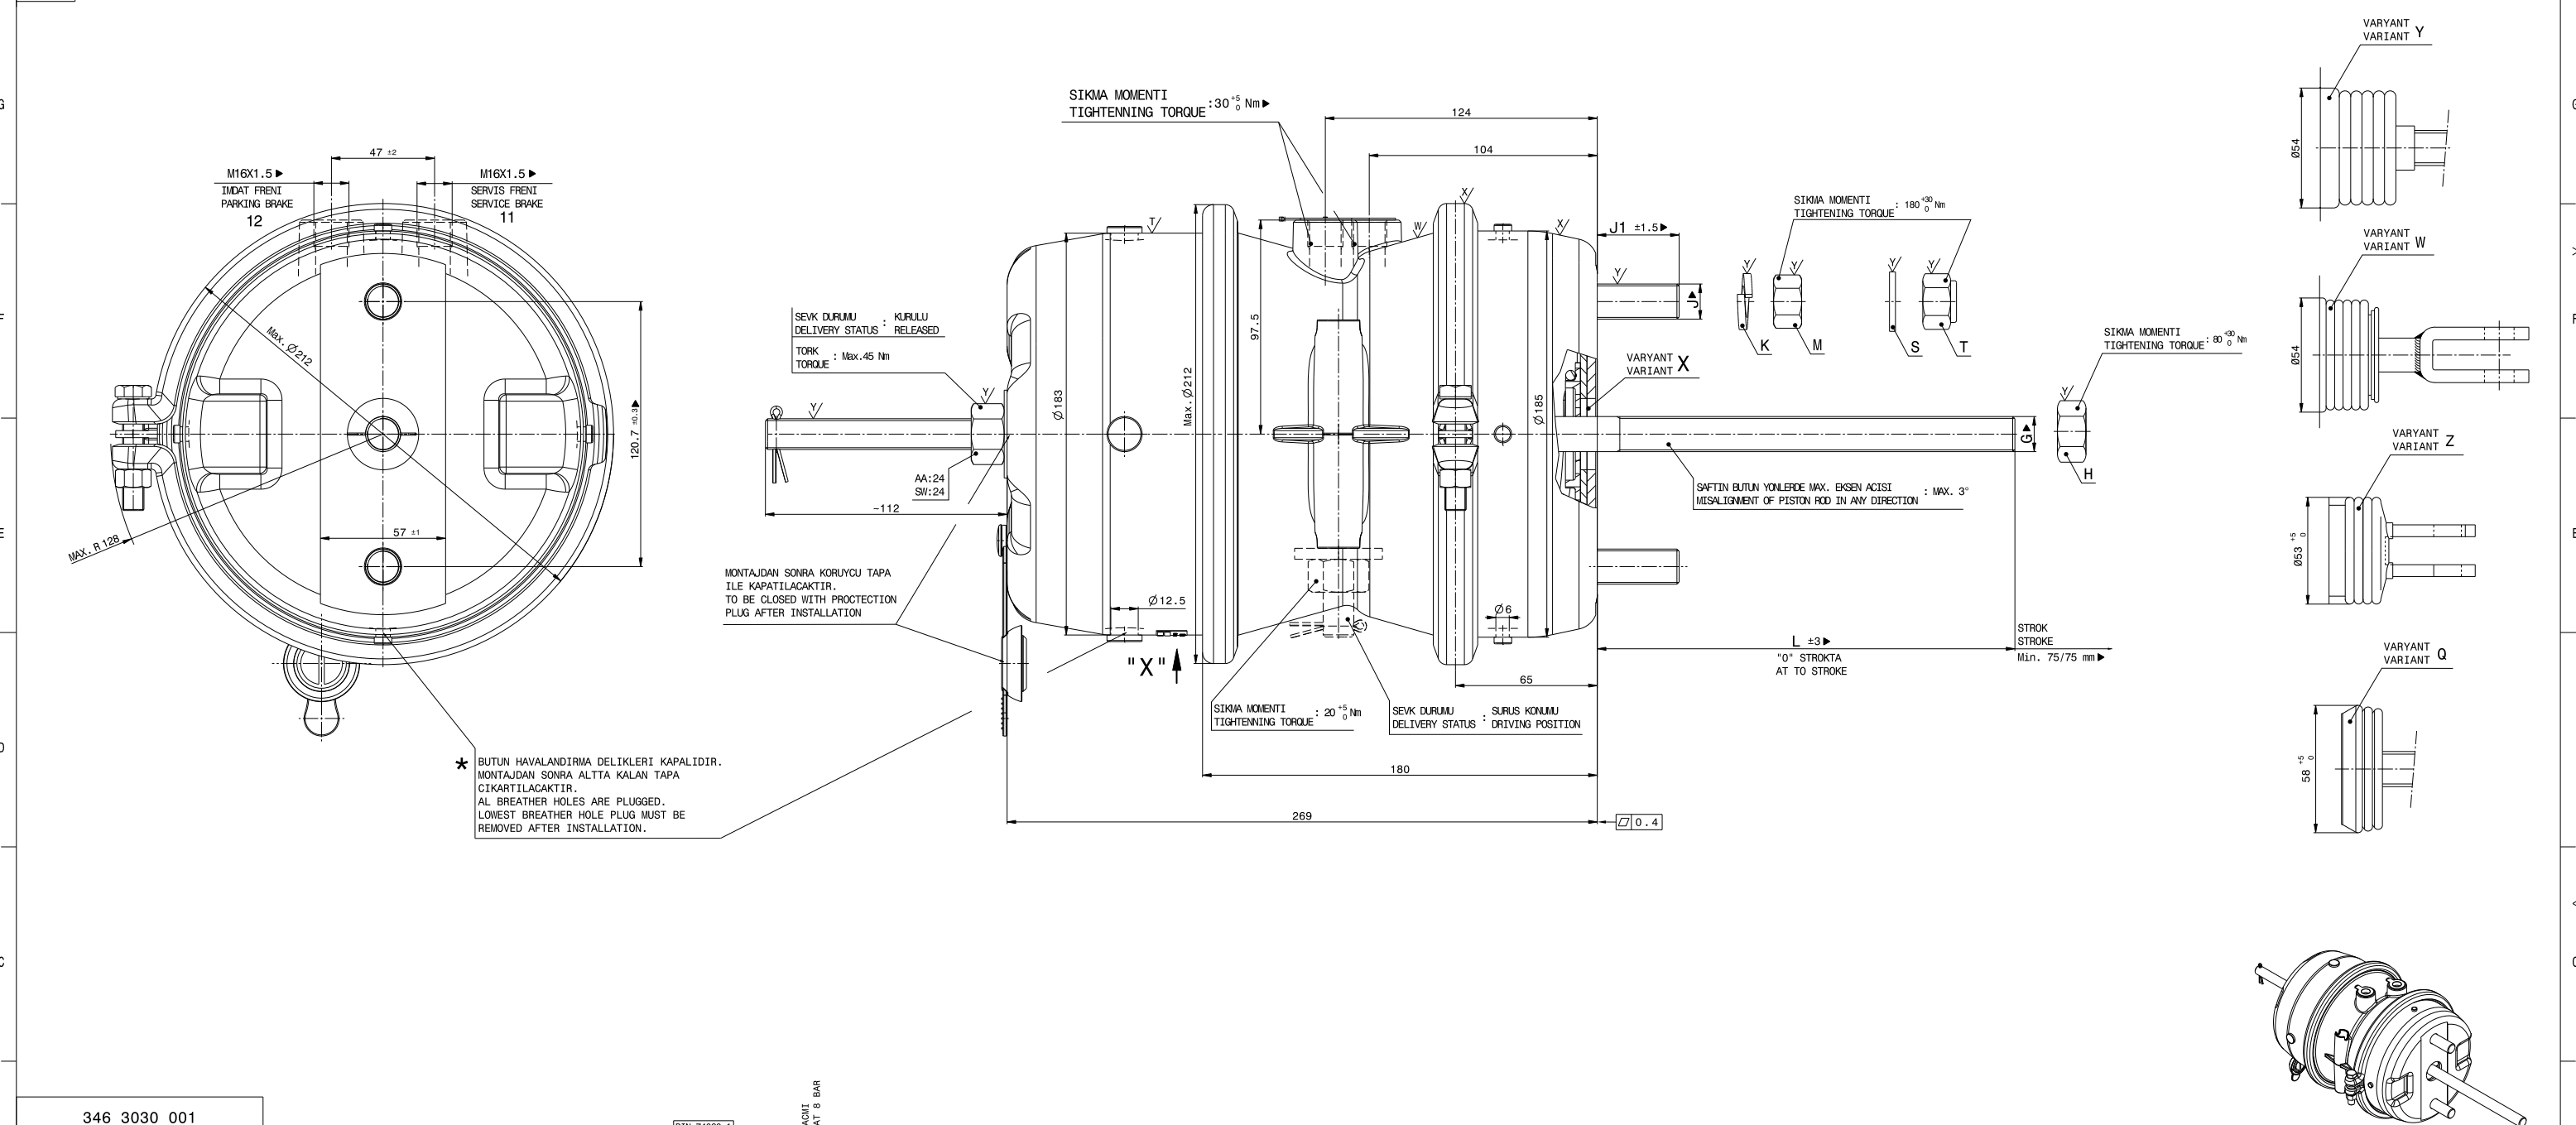

346 3030 001

KUVVET FORCE N

DIN 74060-1

"X" BAKISI VIEW "X"

OLCEK SCALE : 2/1

06.20.T103 TALIMATINA ACCORDING TO INSTRUCTION 06.20.T103

07.01-T03'E GORE / ACCORDING TO 07.01-T03	MEDIA	AIR	NOTE : PERFORMANCE MEASUREMENTS SHOULD BE DONE AFTER CAGING THE SPRING CHAMBER FOR 24 HOURS MINIMUM.			
CLASS : CF1D	OPERATING TEMPERATURE RANGE	-40°C + 80°C				
SPRING BRAKE RELEASE PRESSURE (AT "10 mm." STROKE)	4.9±0.3bar	MAXIMUM OPERATING PRESSURE	10 bar	8.5 bar		
AIR VOLUME OF SPRING BRAKE PART	<=2.2dm³	MAXIMUM PRESSURE (TEMPORARY)	13 bar	10 bar		
FORCE OF RETURN SPRING AT 0 STROKE	250±25N	PERMISSIBLE LEAKAGE	10 cm³ / min.			

CORROSION RESISTANCE	
SYMBOL	ARF08 - 2.1
✓	ARF08 - 5.0
✓	ARF08 - 1.1
✓	ARF08 - 5.1 / ARF08 - 4.4

DURABILITY TEST : (ACCORDING TO INSTRUCTION 06.20-T06)	
SYMBOL : DIN ISO 1219/1	

06.20.T103 TALIMATINA ACCORDING TO INSTRUCTION 06.20.T103	
06.20.T103 TALIMATINA ACCORDING TO INSTRUCTION 06.20.T103	

346 3030 001	B	14	F1	M16X1.5	EVET/YES	M16X1.5	38	HAYIR/NO	HAYIR/NO	EVET/YES	EVET/YES	X	-	245
P/N	CEKTIIRME TIPI YOKE TYPE	ØZ	PIM TIPI PIM TYPE	G	H	J	J1	K	M	S	T	VARYANT VARIANT	L	L1