






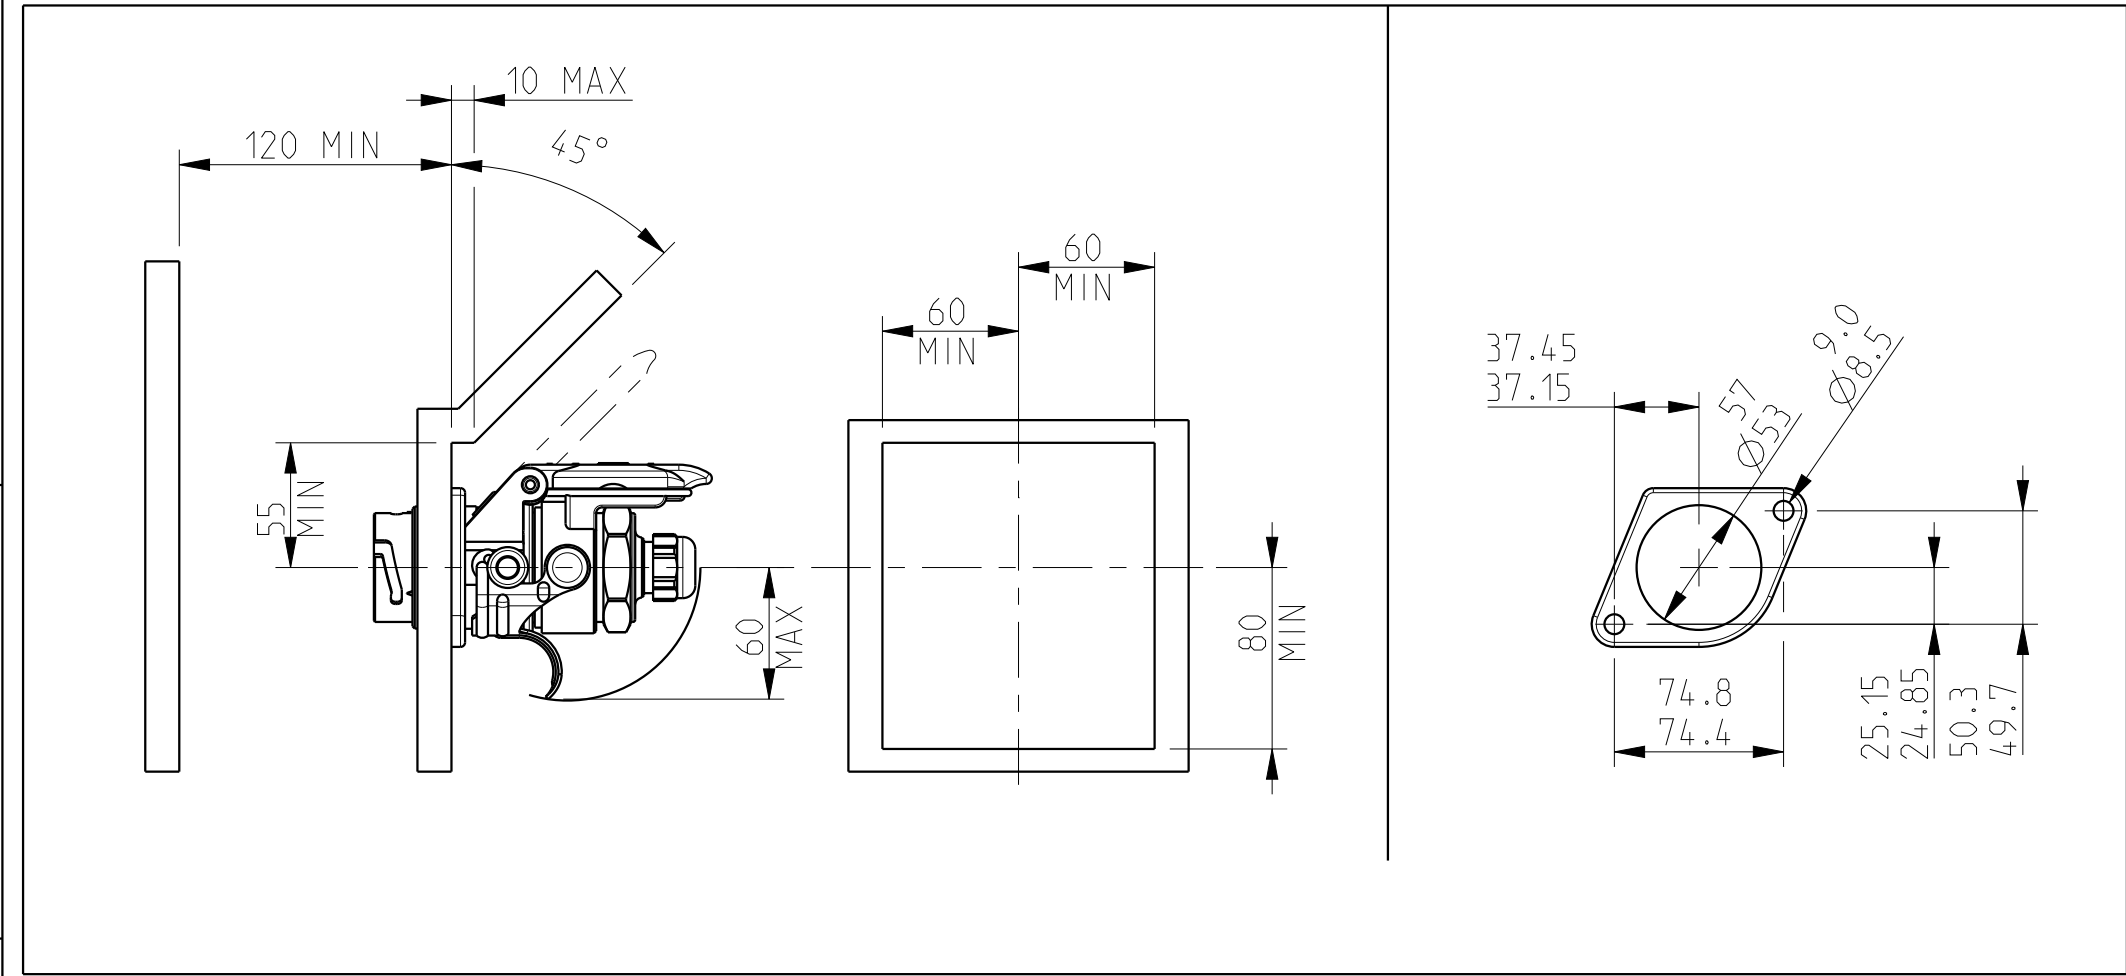


CLEARANCE DIMENSIONS


SOCKET MOUNTING DIMENSIONS

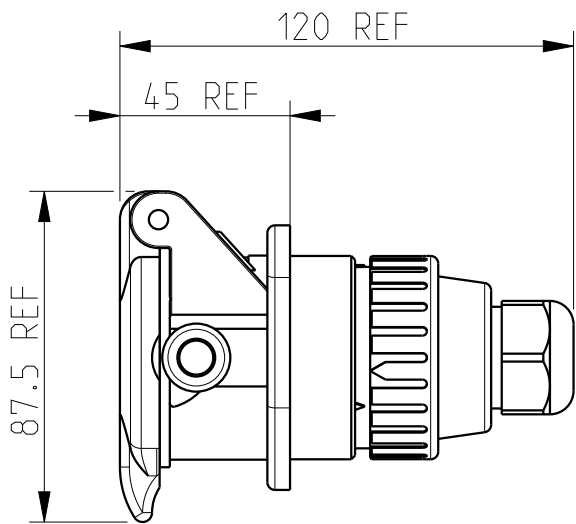

INCLUDED SEPARATELY
REFER TO FITTING INSTRUCTIONS 000 700 336

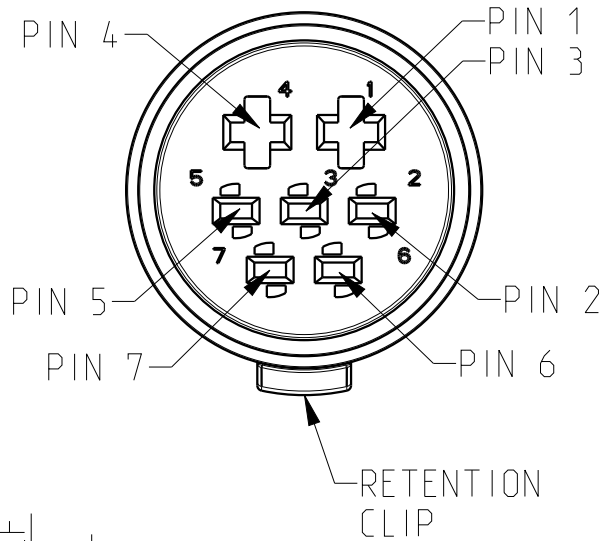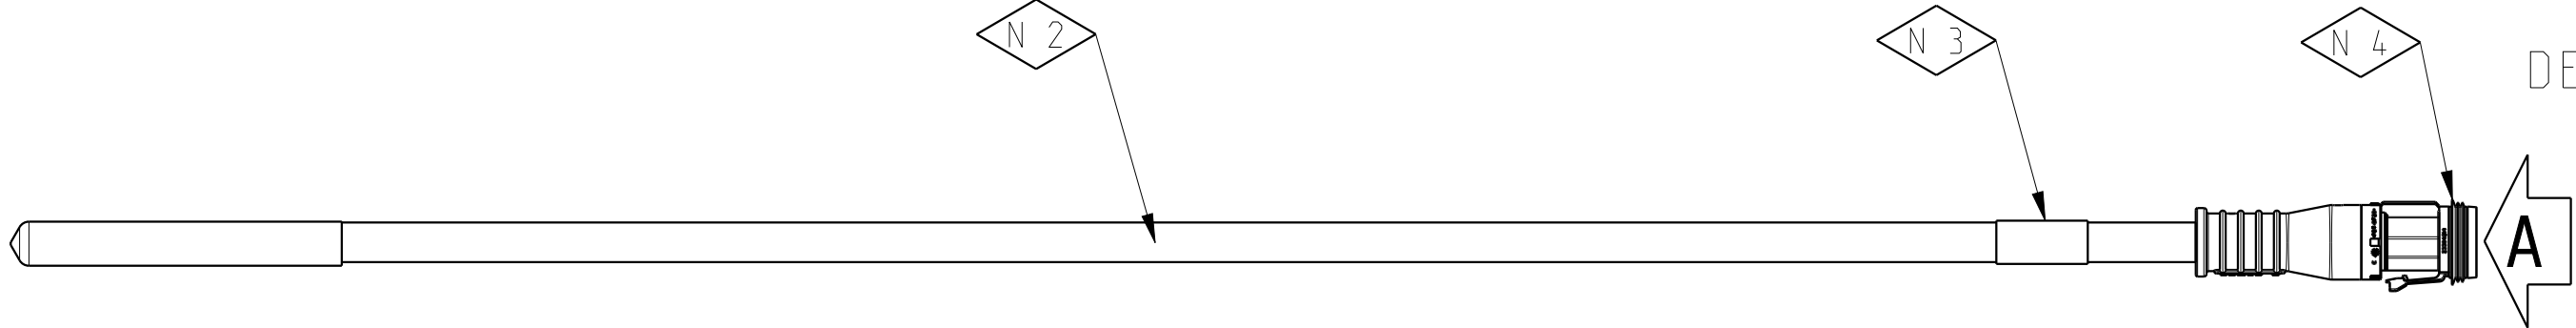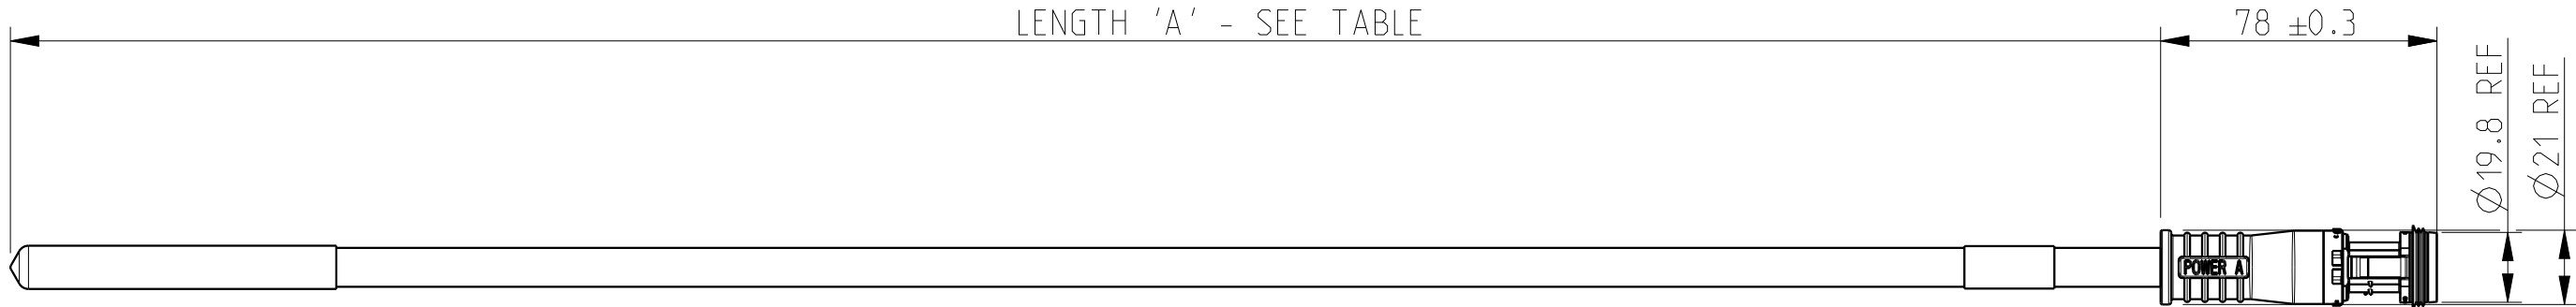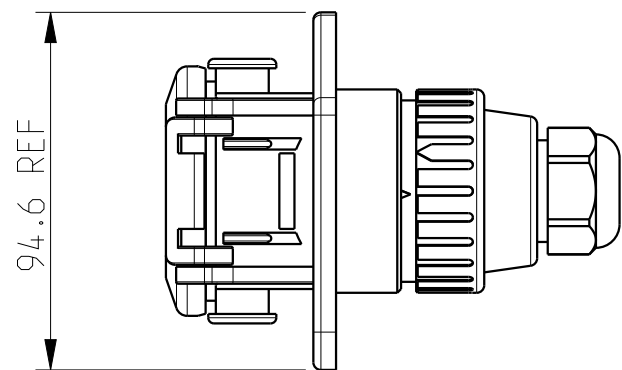

DETAIL C
2:1

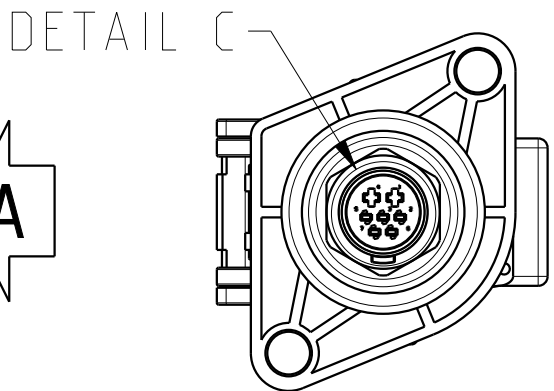

VIEW IN DIRECTION
OF ARROW 'A'

COLOUR	FUNCTION	FROM CONN	FROM PIN
RED	B+P	POWER_CONNECTOR	1
BLACK	B+IGN	POWER_CONNECTOR	2
YELLOW	B-IGN	POWER_CONNECTOR	3
BROWN	B-P	POWER_CONNECTOR	4
WHITE	LAMP	POWER_CONNECTOR	5
WHITE-GREEN	CANH	POWER_CONNECTOR	6
WHITE-BROWN	CANL	POWER_CONNECTOR	7

ASSY No.	LENGTH 'A'
844 003 120	12M ±5%

REV	CHANGE DESCRIPTION AND ORDER NUMBER	DATE	CHANGED	CHECKED	APPROVED
01	01356 - N 5: IP59 (IEC 60529) WAS IP6K9K (ISO 20653)	2022-01-07	P0287	MH060	MH060

- NOTES.
- N 1 CABLE ASSEMBLIES OVER 1.2m IN LENGTH TO BE SUPPLIED IN COILED CONDITION (NOT SHOWN).
- N 2 CABLE MATERIAL: PVC [FLRY(9Y)Y(11Y)]
WIRE CROSS SECTIONAL AREA: $2 \times 4.0 \text{mm}^2 + 3 \times 1.5 \text{mm}^2 + (1 \times 2 \times 1.0 \text{mm}^2)$
- N 3 PART NUMBER IDENTIFICATION.
- N 4 SEAL TO BE PROTECTED FROM DAMAGE PRIOR TO AND DURING INSTALLATION.
- N 5 CABLE ASSEMBLY RATED TO IP59 (IEC 60529).
CABLE ASSEMBLY FULLY CONFORMS TO ADR REQUIREMENTS.

TOLERANCE UNLESS OTHERWISE SPECIFIED -	DOC TYPE ASSEM	SCALE 1:1	MATERIAL -		
THIS DOCUMENT USES SPECIAL CHARACTERISTICS AS DEFINED IN PROCEDURE HDX2-3-364	DRAWN KW 164	DATE 2020-11-05	WEIGHT [ONLY FOR INFO.] -	DIMENSION IN mm DO NOT SCALE DRAWING	
	CHECKED MC028	DATE 2020-12-03	TITLE EB+ 4.0 POWER A TO 24V ISO 7638 SOCKET (KIT)	PROJECTION 1(1)	SHEET A2
Haldex HALDEX BRAKE PRODUCTS LTD MIRA TECHNOLOGY PARK	APPROVED MC028	DATE 2020-12-15	ITEM NUMBER 844_003_000_2	FORMAT A2	