






NOTES.

- N 1 CABLE ASSEMBLIES OVER 1.2m IN LENGTH TO BE SUPPLIED IN COILED CONDITION (NOT SHOWN).
- N 2 CABLE MATERIAL: PVC [FLRY(9Y)Y(11Y)]
WIRE CROSS SECTIONAL AREA: $2 \times 4.0\text{mm}^2 + 3 \times 1.5\text{mm}^2 + (1 \times 2 \times 1.0\text{mm}^2)$
- N 3 PART NUMBER IDENTIFICATION.
- N 4 SEAL TO BE PROTECTED FROM DAMAGE PRIOR TO AND DURING INSTALLATION.
- ①
- N 5 CABLE ASSEMBLY RATED TO IP59 (IEC 60529).
CABLE ASSEMBLY FULLY CONFORMS TO ADR REQUIREMENTS.

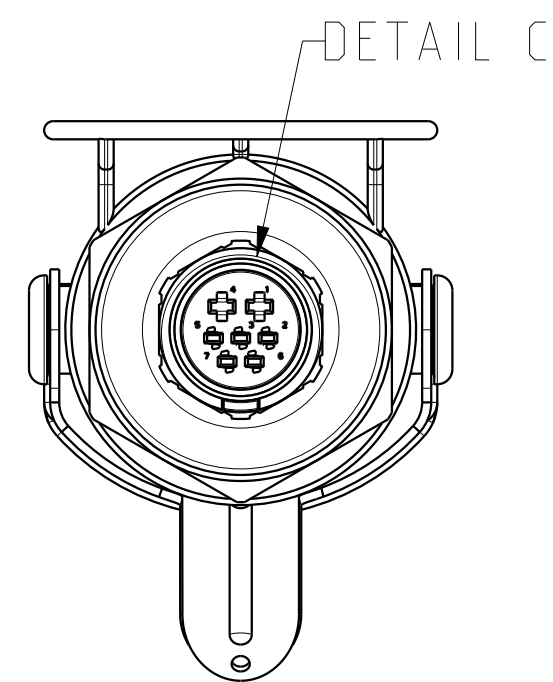

VIEW IN DIRECTION
OF ARROW 'A'

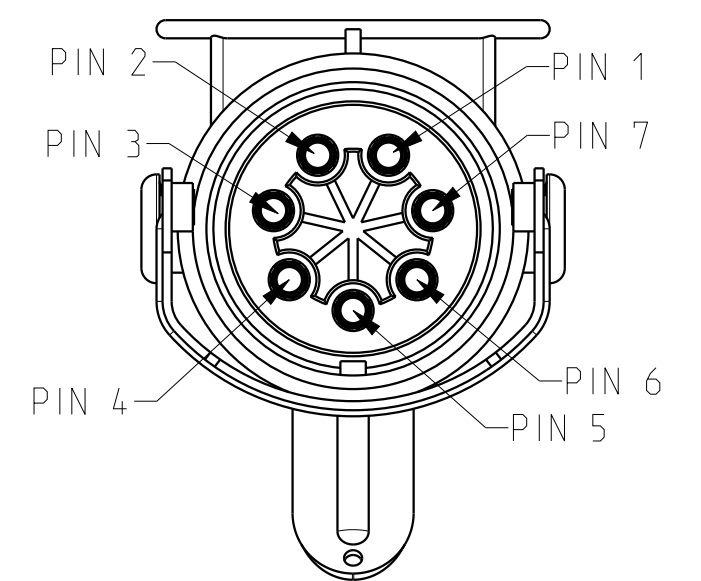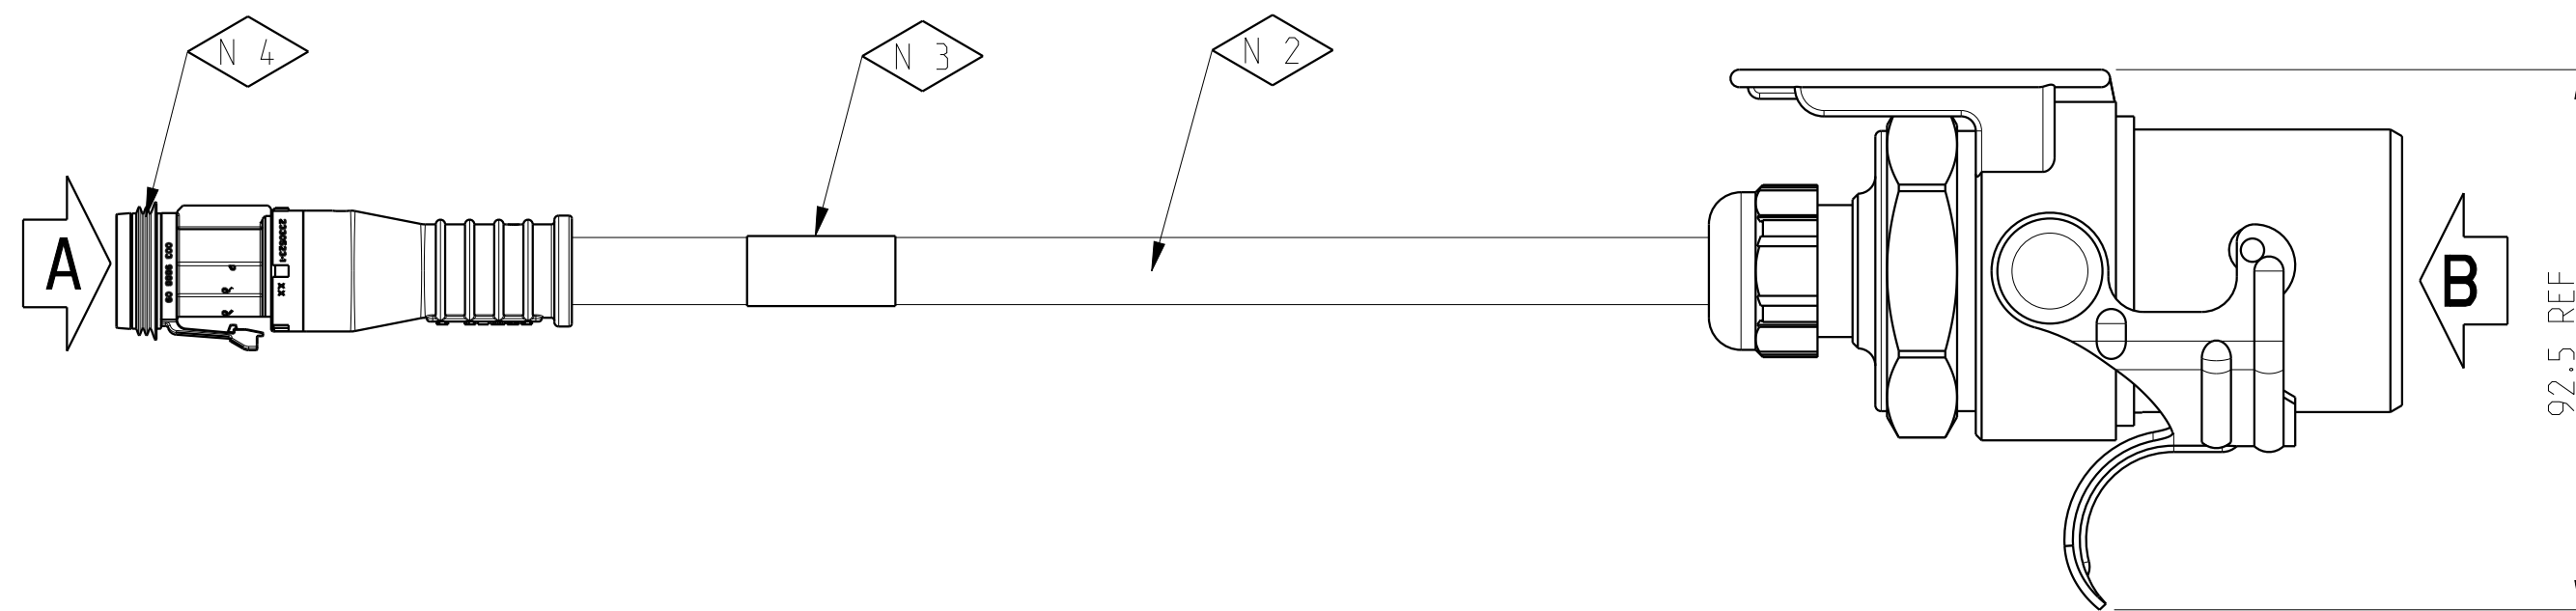

VIEW IN DIRECTION
OF ARROW 'B'



TOLERANCE UNLESS OTHERWISE SPECIFIED -		DOC TYPE ASSEM	SCALE 1:1	MATERIAL -				
 	THIS DOCUMENT USES SPECIAL CHARACTERISTICS AS DEFINED IN PROCEDURE HDX2-3-364	DRAWN KW 164	DATE 2020/10/29	WEIGHT [ONLY FOR INFO.] -		DIMENSION IN mm DO NOT SCALE DRAWING		
		CHECKED MC028	DATE 2020-12-03	TITLE EB+ 4.0 POWER A TO 24V ISO 7638 PLUG				
HALDEX BRAKE PRODUCTS LTD MIRA TECHNOLOGY PARK		APPROVED MC028	DATE 2020-12-15	ITEM NUMBER 844_021_000_2		PROJECTION 	SHEET 1(1)	FORMAT A2

GENERIC MODEL (INFO ONLY):	844_021_000_2
----------------------------	---------------