© THIS DOCUMENT IS THE PROPERTY OF THE HALDEX GROUP. AND CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED. UTILIZED OR DIVULGED. IN WHOLE OR IN PART. WITHOUT WRITTEN AUTHORIZATION

REV	CHANGE DESCRIPTION AND ORDER NUMBER	DATE	CHANGED	CHECKED	APPROVED
01	01356 - N 5: IP59 (IEC 60529) WAS IP6K9K (ISO 20653)	2022-01-07	P0287	MH060	MH060



DETAIL C
2:1

NOTES.

N 1 CABLE ASSEMBLIES OVER 1.2m IN LENGTH TO BE SUPPLIED IN COILED CONDITION (NOT SHOWN).

N 2 CABLE MATERIAL: PVC [FL(R)YY]
WIRE CROSS SECTIONAL AREA: 2x1.5mm²

N 3 PART NUMBER IDENTIFICATION.

N 4 SEAL TO BE PROTECTED FROM DAMAGE PRIOR TO AND DURING INSTALLATION.

N 5 (1) CABLE ASSEMBLY RATED TO IP59 (IEC 60529).
CABLE ASSEMBLY FULLY CONFORMS TO ADR REQUIREMENTS.

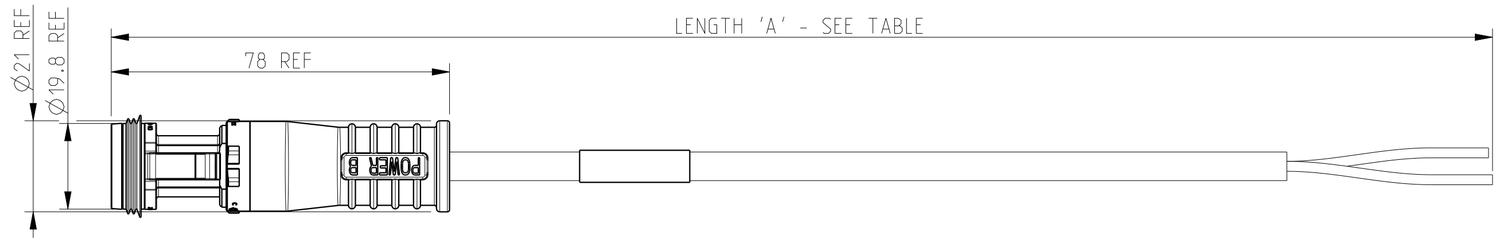



VIEW IN DIRECTION OF ARROW 'A'

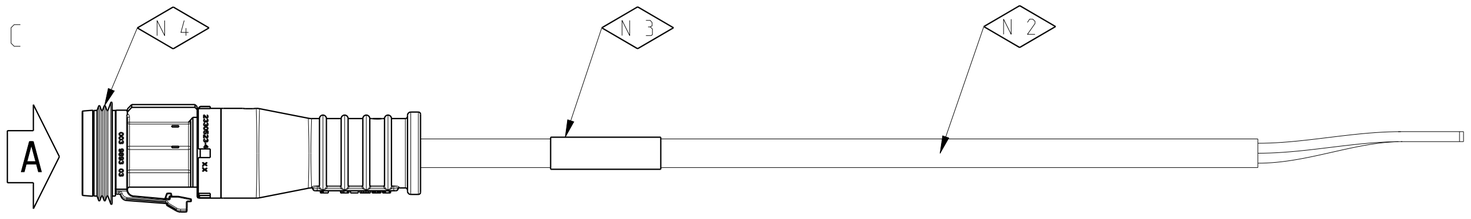

N 1

ASSY No.	LENGTH 'A'
844 201 040	4M ±10%
844 201 060	6M ±10%
844 201 090	9M ±10%
844 201 120	12M ±5%
844 201 160	16M ±5%

COLOUR	FUNCTION	FROM CONN	FROM PIN
RED	B+24N	24N_CONNECTOR	1
WHITE	B-24N	24N_CONNECTOR	4

TOLERANCE UNLESS OTHERWISE SPECIFIED –	DOC TYPE ASSEM	SCALE 1:1	MATERIAL –		
THIS DOCUMENT USES SPECIAL CHARACTERISTICS AS DEFINED IN PROCEDURE HDX2-3-364	DRAWN KW 164	DATE 2020-11-02	WEIGHT [ONLY FOR INFO.] –	DIMENSION IN mm DO NOT SCALE DRAWING	
Haldex HALDEX BRAKE PRODUCTS LTD MIRA TECHNOLOGY PARK	CHECKED MC028	DATE 2020-12-03	TITLE EB+ 4.0 24N CABLE		
	APPROVED MC028	DATE 2020-12-15	ITEM NUMBER 844_201_000_2	PROJECTION	SHEET 1(1) / FORMAT A2

GENERIC MODEL (INFO ONLY): 844_201_000_2