

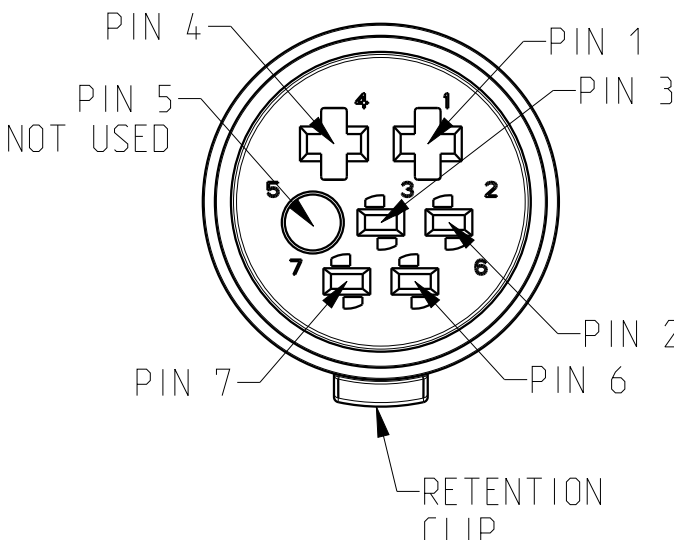


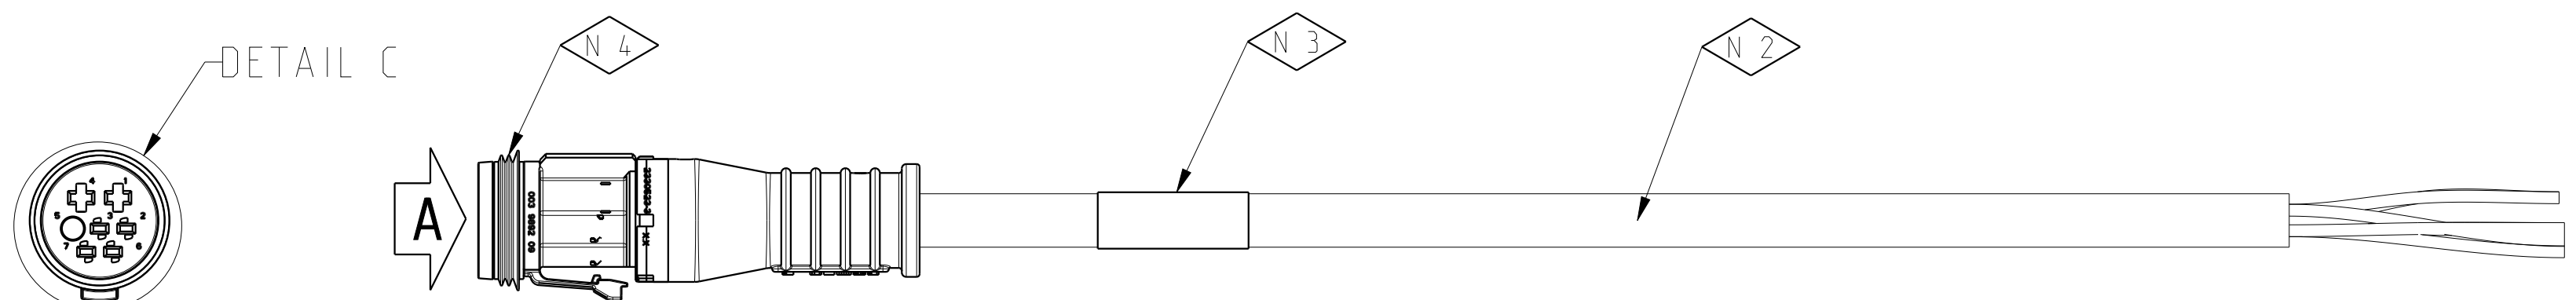

DETAIL C
2:1

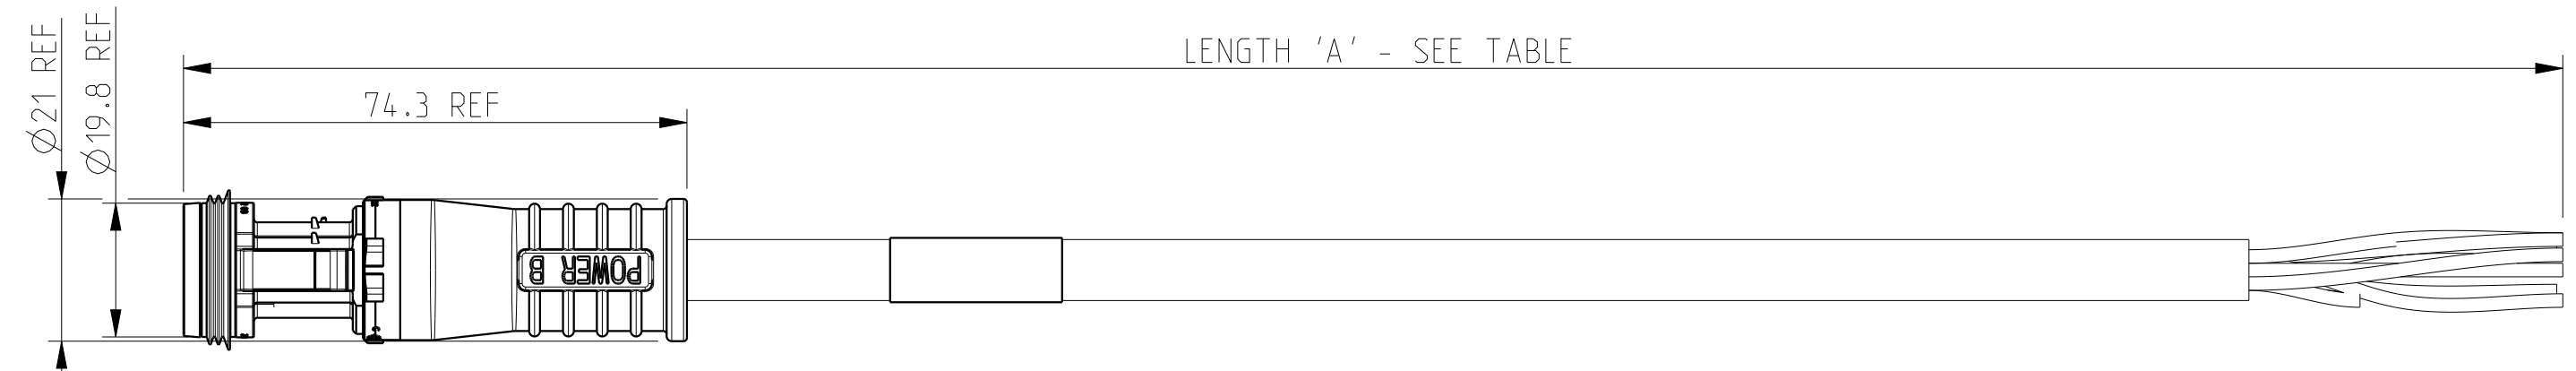

VIEW IN DIRECTION
OF ARROW 'A'

COLOUR	FUNCTION	FROM CONN	FROM PIN
RED	B+24N	ECU_CONNECTOR	1
GREEN	AUXC	ECU_CONNECTOR	2
BROWN	AUXB	ECU_CONNECTOR	3
WHITE	B-24N	ECU_CONNECTOR	4
BLACK	AUXB+PSU	ECU_CONNECTOR	6
YELLOW	AUXA	ECU_CONNECTOR	7

ASSY No.	LENGTH 'A'
844 221 040	4M ±10%
844 221 060	6M ±10%
844 221 090	9M ±10%
844 221 120	12M ±5%

REV	CHANGE DESCRIPTION AND ORDER NUMBER	DATE	CHANGED	CHECKED	APPROVED
01	01356 - N 5: IP59 (IEC 60529) WAS IP6K9K (ISO 20653)	2022-01-07	P0287	MH060	MH060

- NOTES.
- N 1 CABLE ASSEMBLIES OVER 1.2m IN LENGTH TO BE SUPPLIED IN COILED CONDITION (NOT SHOWN).
- N 2 CABLE MATERIAL: PVC [FL(R)YY]
WIRE CROSS SECTIONAL AREA: 7x1.5mm²
- N 3 PART NUMBER IDENTIFICATION.
- N 4 SEAL TO BE PROTECTED FROM DAMAGE PRIOR TO AND DURING INSTALLATION.
- N 5 CABLE ASSEMBLY RATED TO IP59 (IEC 60529).
CABLE ASSEMBLY FULLY CONFORMS TO ADR REQUIREMENTS.

TOLERANCE UNLESS OTHERWISE SPECIFIED -		DOC TYPE ASSEM	SCALE 1:1	MATERIAL -		
 THIS DOCUMENT USES SPECIAL CHARACTERISTICS AS DEFINED IN PROCEDURE HDX2-3-364	DRAWN KW 164	DATE 2020-11-02	WEIGHT [ONLY FOR INFO.] -		DIMENSION IN mm DO NOT SCALE DRAWING	
	 HALDEX BRAKE PRODUCTS LTD MIRA TECHNOLOGY PARK	CHECKED MC028	DATE 2020-12-03	TITLE EB+ 4.0 SUPER AUX CABLE		
APPROVED MC028		DATE 2020-12-15	ITEM NUMBER 844_221_000_2	PROJECTION 	SHEET 1(1)	FORMAT A2