© THIS DOCUMENT IS THE PROPERTY OF THE HALDEX GROUP. AND CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED. UTILIZED OR DIVULGED. IN WHOLE OR IN PART. WITHOUT WRITTEN AUTHORIZATION

| REV | CHANGE DESCRIPTION AND ORDER NUMBER | DATE | CHANGED | CHECKED | APPROVED |
|---|---|---|---|---|---|
| 01 | 01356 - N 5: IP59 (IEC 60529) WAS IP6K9K (ISO 20653) | 2022-01-07 | P0287 | MH060 | MH060 |




DETAIL C
2:1




DETAIL D
2:1

NOTES.

N 1 CABLE ASSEMBLIES OVER 1.2m IN LENGTH TO BE SUPPLIED IN COILED CONDITION (NOT SHOWN).

N 2 CABLE MATERIAL: PU [FL(R)Y11Y)] WIRE CROSS SECTIONAL AREA: 2x0.35mm²

N 3 PART NUMBER IDENTIFICATION.

N 4 SEAL TO BE PROTECTED FROM DAMAGE PRIOR TO AND DURING INSTALLATION.

N 5 CABLE ASSEMBLY RATED TO IP59 (IEC 60529) (1). CABLE ASSEMBLY FULLY CONFORMS TO ADR REQUIREMENTS.

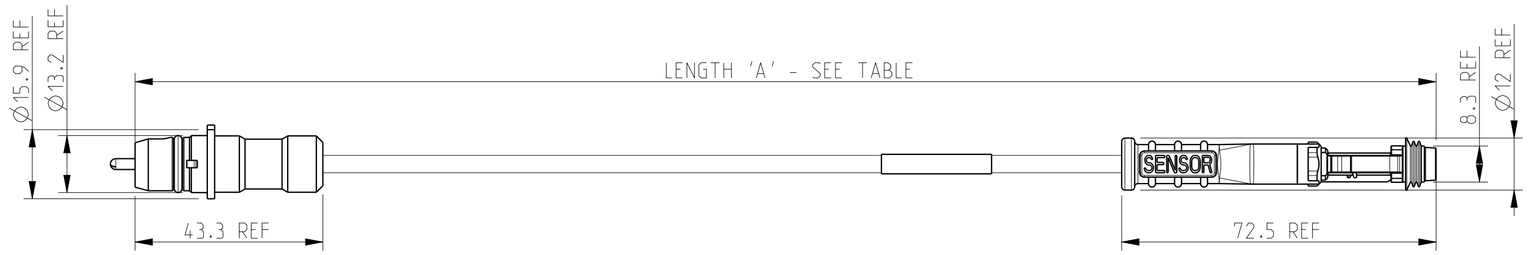


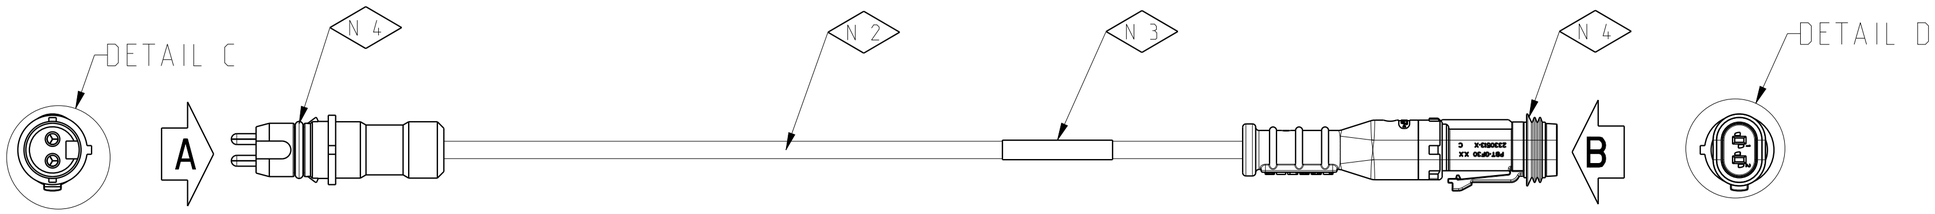


VIEW IN DIRECTION OF ARROW 'A'

VIEW IN DIRECTION OF ARROW 'B'

N 1

| ASSY No. | LENGTH 'A' |
|---|---|
| 844 401 020 | 2M ±10% |
| 844 401 030 | 3M ±10% |
| 844 401 040 | 4M ±10% |
| 844 401 060 | 6M ±10% |
| 844 401 080 | 8M ±10% |
| 844 401 100 | 10M ±5% |
| 844 401 120 | 12M ±5% |
| 844 401 140 | 14M ±5% |

| COLOUR | FUNCTION | FROM CONN | FROM PIN | TO CONN | TO PIN |
|---|---|---|---|---|---|
| BROWN | HI | SENSOR_INLINE | 1 | ECU_CONNECTOR | 1 |
| BLACK | LO | SENSOR_INLINE | 2 | ECU_CONNECTOR | 2 |

| | | | | | |
|---|---|---|---|---|---|
| TOLERANCE UNLESS OTHERWISE SPECIFIED – | DOC TYPE ASSEM | SCALE 1:1 | MATERIAL – | | |
| THIS DOCUMENT USES SPECIAL CHARACTERISTICS AS DEFINED IN PROCEDURE HDX2-3-364 | DRAWN KW 164 | DATE 2020/10/29 | WEIGHT [ONLY FOR INFO.] – | DIMENSION IN mm | DO NOT SCALE DRAWING |
| Haldex HALDEX BRAKE PRODUCTS LTD MIRA TECHNOLOGY PARK | CHECKED MC028 | DATE 2020/10/29 | TITLE EB+ 4.0 SENSOR EXTENSION CABLE | | |
| | APPROVED MC028 | DATE 2020-12-15 | ITEM NUMBER 844_401_000_2 | PROJECTION | SHEET 1(1) / FORMAT A2 |

GENERIC MODEL (INFO ONLY): 844_401_000_2