


PART No.
814 018 300 2

COMPUTER PRODUCED DRAWING
MUST NOT BE CHANGED MANUALLY

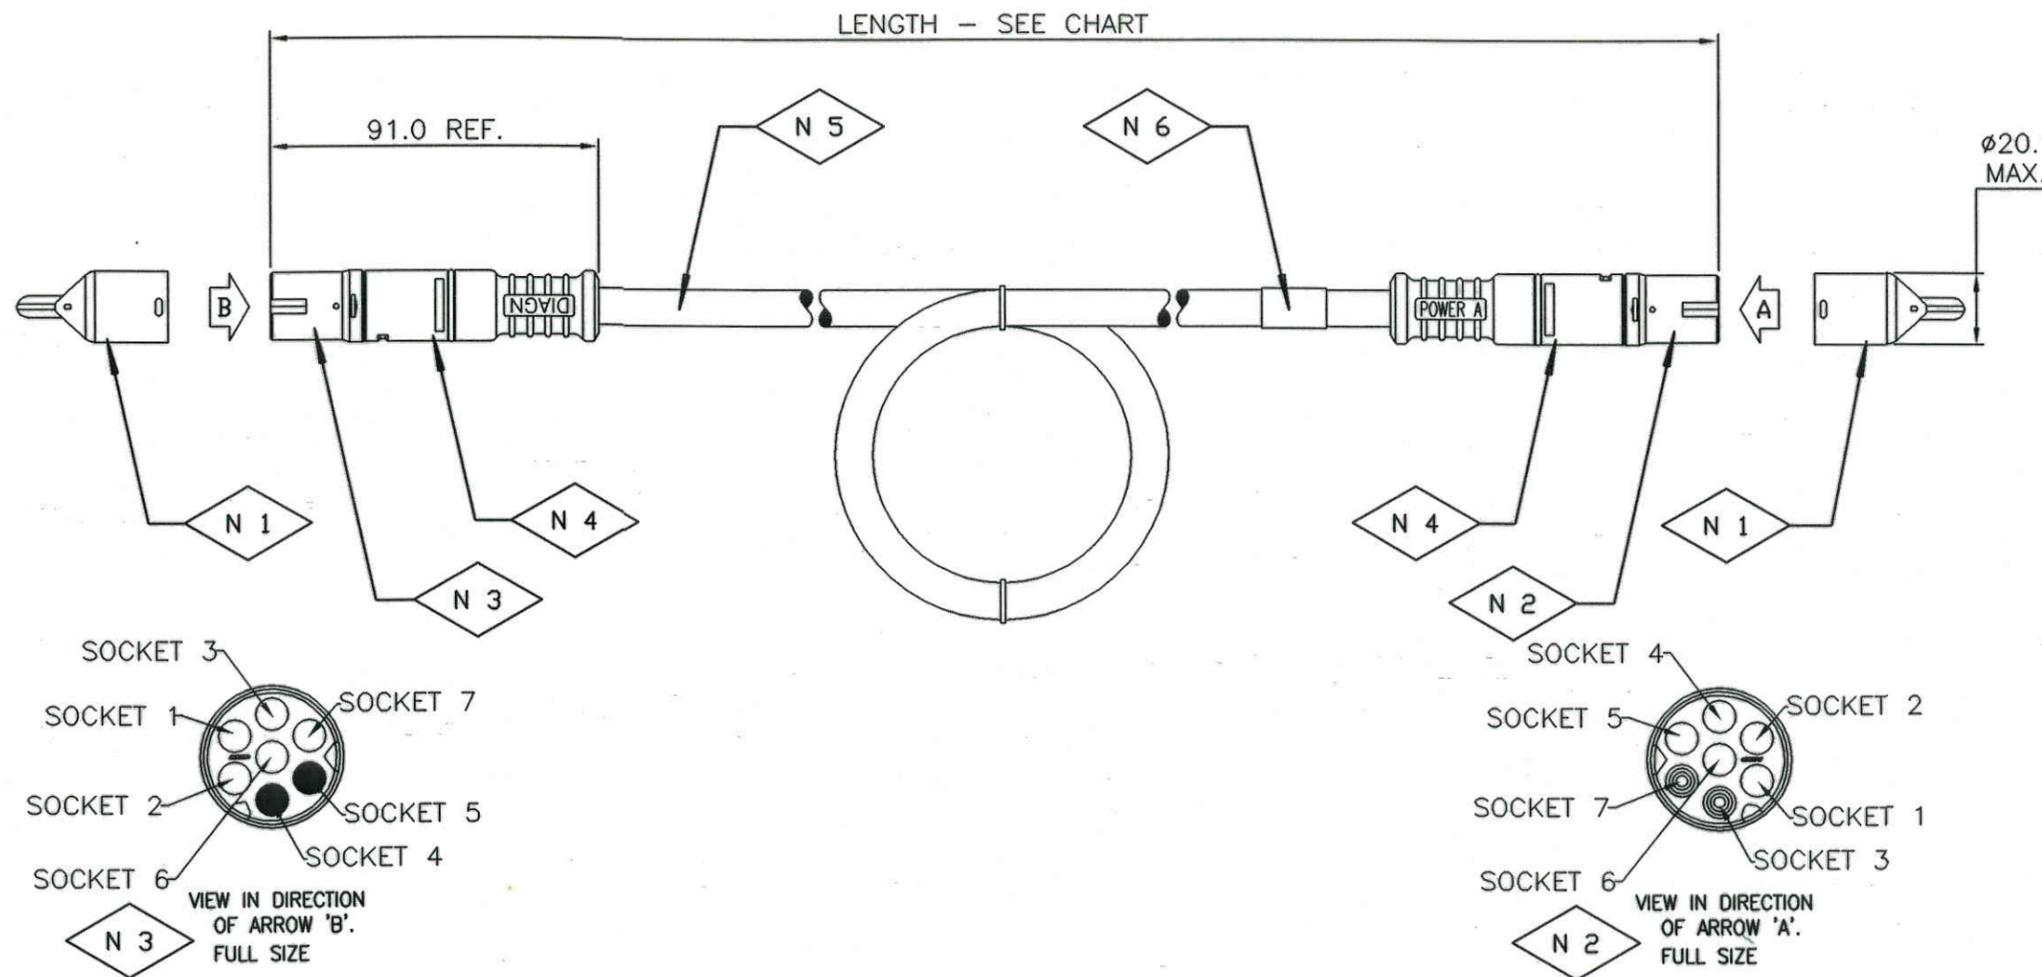

- N 1 PROTECTIVE CAP - DO NOT REMOVE UNTIL FITMENT TO ECU.
- N 2 POWER A - CONNECTOR (BLUE) SOCKET CONFIGURATION
- N 3 DIAGN - CONNECTOR (PURPLE) SOCKET CONFIGURATION
- N 4 'O'-RINGS TO BE PROTECTED FROM DAMAGE PRIOR TO ASSEMBLY.
- N 5 WIRES CROSS-SECTIONAL AREA = 2x4.00mm² & 3x1.50mm²
- N 6 PART NUMBER IDENTIFICATION

THIS DRAWING/SPECIFICATION USES CLASSIFIED CHARACTERISTIC SYMBOLS DEFINED IN QUALITY PROCEDURE 4.17

ISS	CHANGE	CHEC	DATE	ISS	CHANGE	CHEC	DATE
2	C5686	JFB	24/07/09				
1	PR1958	HSU	01.07.08				

AutoCAD PART

THIS DRAWING/DRAWING IS COPYRIGHT AND THE PROPERTY OF HALDEX BRAKE PRODUCTS LIMITED. IT MUST NOT BE COPIED (IN WHOLE OR IN PART) USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY. ANY COPIES OF THIS DRAWING/DRAWING MADE BY ANY METHOD MUST ALSO INCLUDE A COPY OF THIS LEGEND. ©2008

NOTE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES

- 1 ISO METHOD A PROJECTION.
- 2 S. I. UNITS.
- 3 SURFACE FINISH TO BS 308/BS 1134.
- 4 DIMS. APPLY AFTER CHEMICAL OR ELECTRO-PLATED FINISH.
- 5 WELD SYMBOLS TO BS 499.
- 6 D DATUM DIMENSIONS.
- 7 METRIC THREADS TO BS 3643/DIN 13.
- 8 UNIFIED THREADS TO BS 1580.

ASSOCIATED SPECIFICATIONS
-

MATERIAL
-
HEAT TREATMENT
-
FINISH
-
FORM
-

DRAWN	DATE
HS Ubhi	01.07.08
CHECKED	DATE
<i>[Signature]</i>	28/07/09
APPROVED SPECIALIST	DATE
<i>[Signature]</i>	28/07/09
APPROVED FOR ISSUE	DATE
<i>[Signature]</i>	28/07/09

TITLE
EB+ CAN REPEATER
DOLLY CABLE ASSEMBLY
(5 - CORE)

ORIGINAL SCALE WAS
1:1

SHEET 1 OF 1

Haldex

HALDEX BRAKE PRODUCTS LTD.
MOONS MOAT DRIVE, REDDITCH, WORCS. B98 7HA

PART No.
814 018 300 2

A3