

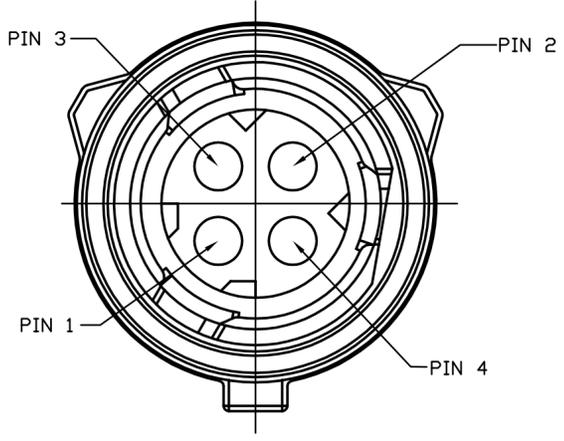


PART No. 814 029 000 2


COMPUTER PRODUCED DRAWING
MUST NOT BE CHANGED MANUALLY

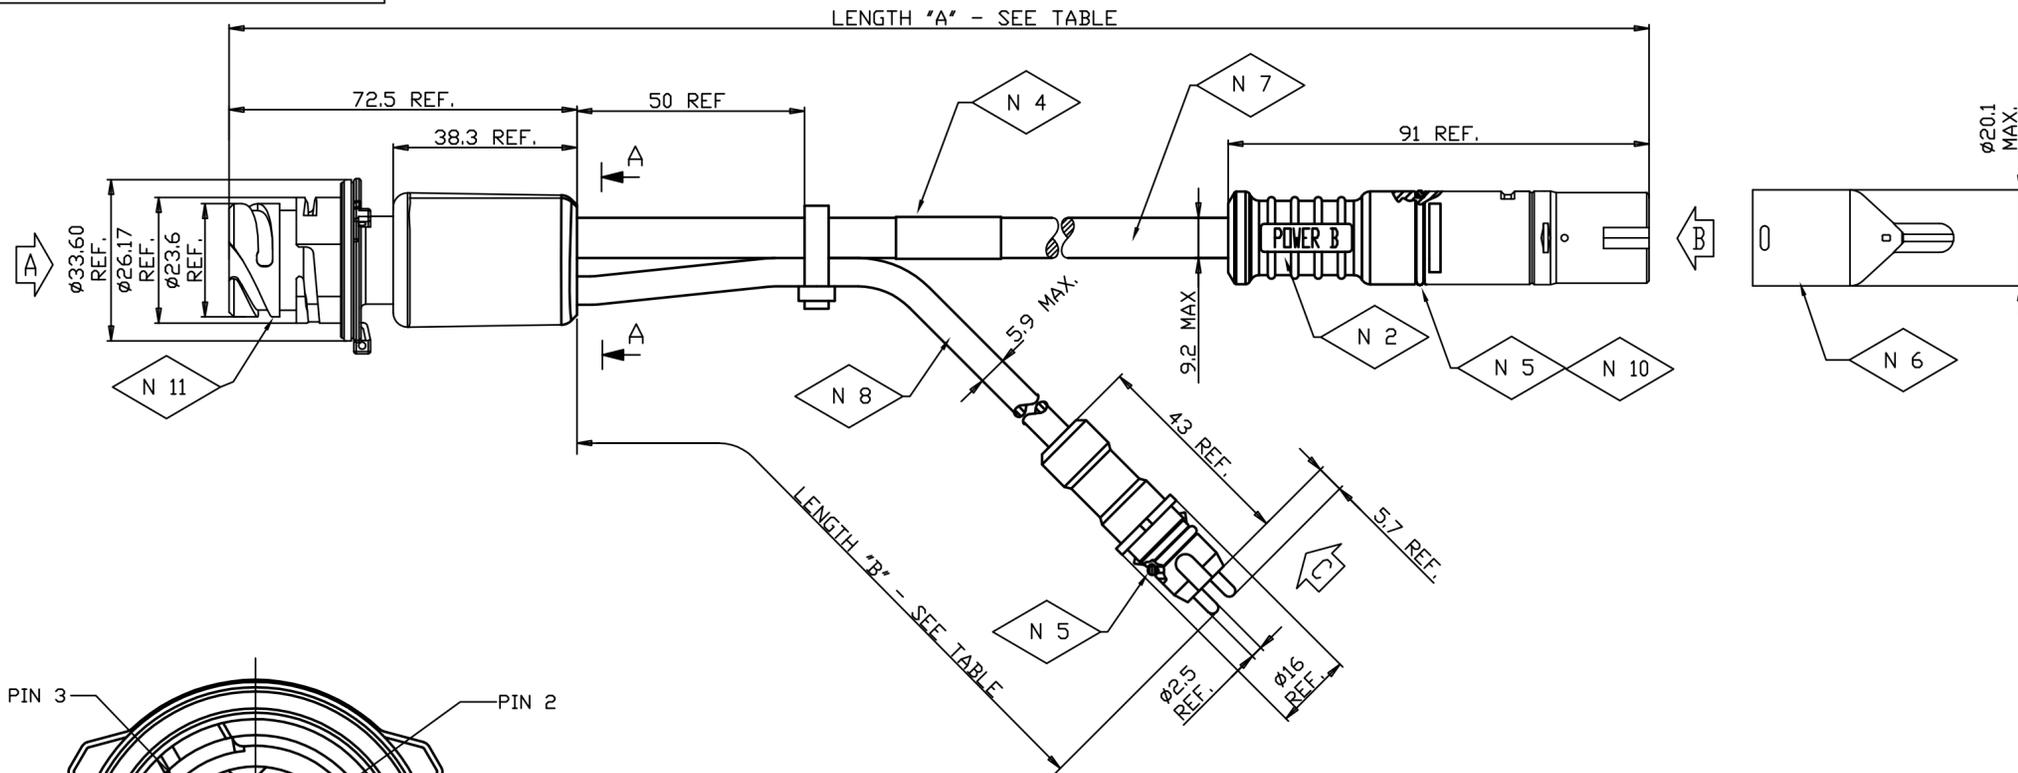


VIEW IN DIRECTION OF ARROW 'A', 2:1

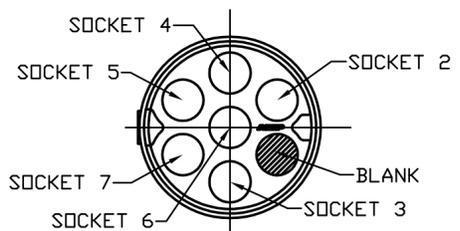

VIEW IN DIRECTION OF ARROW 'B', 2:1



VIEW IN DIRECTION OF ARROW 'C', 2:1

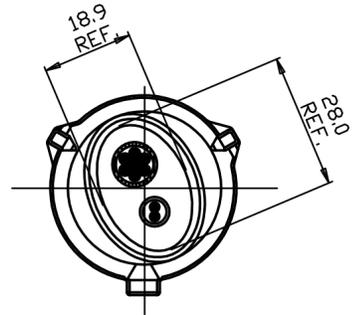

SECTION A-A VIEW 1:1

- N 1 ISO 15170 - PIN CONFIGURATION:
PIN 1 - B+ STOPLIGHT (24N)
PIN 2 - B- (24N)
PIN 3 - SUPER AUX A INPUT
PIN 4 - SUPER AUX B INPUT
- N 2 POWER B - SOCKET CONFIGURATION:
SOCKET 1 - BLANK
SOCKET 2 - B+ STOPLIGHT (24N)
SOCKET 6 - B- (24N)
SOCKET 7 - SUPER AUX A INPUT
SOCKET 5 - SUPER AUX B INPUT
SOCKET 3 - SUPER AUX 24V OUTPUT
SOCKET 4 - SUPER AUX C INPUT
- N 3 SENSOR PLUG - PIN CONFIGURATION:
PIN 1 - SUPER AUX C INPUT
PIN 2 - SUPER AUX 24V OUTPUT
- N 4 PART NUMBER IDENTIFICATION.
- N 5 'O'-RING TO BE PROTECTED FROM DAMAGE PRIOR TO INSTALATION.
- N 6 DO NOT REMOVE PROTECTIVE CAP PRIOR TO ASSEMBLY.
- N 7 WIRE CROSS SECTIONAL AREA = 1.5mm²
CABLE OUTER SHEATH MATERIAL: PVC
- N 8 WIRES CROSS SECTIONAL AREA = 1.0mm²
CABLE OUTER SHEATH MATERIAL: PVC
- N 9 -
- N10 POWER B CONNECTOR - BLACK
- N11 ISD CONNECTOR - ISO15170-A1-4.1 PLUG

THIS DRAWING/SPECIFICATION USES CLASSIFIED CHARACTERISTIC SYMBOLS DEFINED IN QUALITY PROCEDURE 4.17

HALDEX ASSY No	LENGTH A	LENGTH B	WEIGHT	ISS	CHANGE	DATE
814 029 001	1 m	1 m	293 g	1	PR2049	18. 05. 10
814 029 011	6 m	5 m	1.3 kg	1	PR2049	18. 05. 10
814 029 021	6 m	1 m	1.1 kg	1	C5972	15. 10. 10

ISS	CHANGE	CHEC	DATE	ISS	CHANGE	CHEC	DATE
6	C6416	MPH	10/06/13				
5	C5972	GIL	15/10/10				
4	C5970	GIL	01/10/10				
3	C5891	PL	29/04/10				
2	C5884	PL	12/04/10				
1	PR2049	PL	18/03/10				

THIS DRAWING/DOCUMENT IS COPYRIGHT AND THE PROPERTY OF HALDEX BRAKE PRODUCTS LIMITED. IT MUST NOT BE COPIED (IN WHOLE OR IN PART) USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY. ANY COPIES OF THIS DRAWING/DOCUMENT MADE BY ANY METHOD MUST ALSO INCLUDE A COPY OF THIS LEGEND.

NOTE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES
 1 ISO METHOD A PROJECTION.
 2 S. I. UNITS.
 3 SURFACE FINISH TO BS 308/BS 1134.
 4 DIMS. APPLY AFTER CHEMICAL OR ELECTRO-PLATED FINISH.
 5 WELD SYMBOLS TO BS 499.
 6 D DATUM DIMENSIONS.
 7 METRIC THREADS TO BS 3643/DIN 13.
 8 UNIFIED THREADS TO BS 1580.

ASSOCIATED SPECIFICATIONS

MATERIAL -
 HEAT TREATMENT -
 FINISH -
 FORM -

DRAWN PL
 CHECKED
 APPROVED SPECIALIST JPH
 APPROVED FOR ISSUE JPH

DATE 18. 03. 10.
 DATE 11/06/13
 DATE 11/06/13
 DATE 11/06/13

TITLE
 EB+ POWER B
 TO ISO 15170 (4-POLE)
 & SENSOR STYLE PLUG
 SUPER AUX SPLITTER CABLE

Haldex
 HALDEX BRAKE PRODUCTS LTD.
 MOONS MOAT DRIVE, REDDITCH, WORCS. B98 7HA
 PART No. 814 029 000 2
 SHEET 1 OF 1