


PART No.
814 041 000 2

COMPUTER PRODUCED DRAWING
MUST NOT BE CHANGED MANUALLY

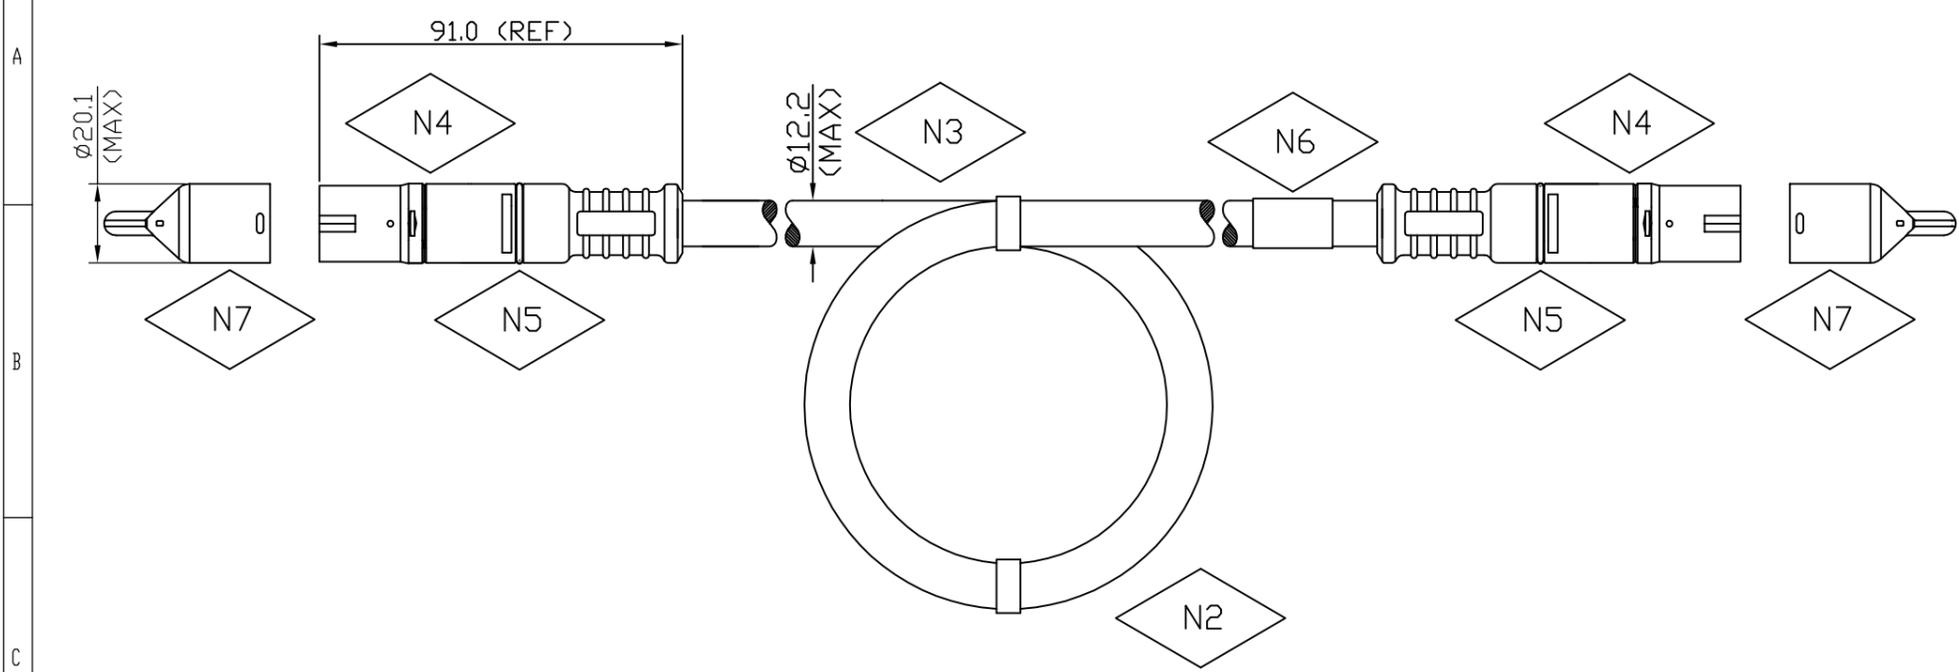

- N 1 SEE CHART 'A' FOR CABLE ASSEMBLY PART NUMBER.
- N 2 CABLE IS SUPPLIED COILED IN A PLASTIC BAG
- N 3 CABLE INSULATION MATERIAL
- PVC
WIRE CROSS SECTIONAL AREA
- 3 x 0.75mm²
- 3 x 1.50mm²
- 1 x 4.00mm²
- N 4 CONFORMS TO IP67 (BS EN 60529) WHEN MATED WITH EB+ ECU
- N 5 SEAL TO BE PROTECTED FROM DAMAGE PRIOR TO ASSEMBLY
- N 6 PART NUMBER IDENTIFICATION
- N 7 PROTECTIVE CAP - DO NOT REMOVE UNTIL FITMENT TO ECU

CHART A	
ASSY. No.	LENGTH
814 041 001	12m
814 041 011	2m
814 041 021	5m
814 041 031	14m
814 041 041	10m
814 041 051	8m

K **M**
T THIS DRAWING/SPECIFICATION USES CLASSIFIED CHARACTERISTIC SYMBOLS DEFINED IN QUALITY PROCEDURE 4.17

1	PR2090	MPH	19-01-12				
ISS	CHANGE	CHEC	DATE	ISS	CHANGE	CHEC	DATE

AutoCAD PART
THIS DRAWING/DOCUMENT IS COPYRIGHT AND THE PROPERTY OF HALDEX BRAKE PRODUCTS LIMITED. IT MUST NOT BE COPIED (IN WHOLE OR IN PART) USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY. ANY COPIES OF THIS DRAWING/DOCUMENT MADE BY ANY METHOD MUST ALSO INCLUDE A COPY OF THIS LEGEND. © 2011

NOTE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES
1 ISO METHOD A ϕ PROJECTION.
2 S.I. UNITS.
3 SURFACE FINISH TO BS 308/BS 1134.
4 DIMS. APPLY AFTER CHEMICAL OR ELECTRO-PLATED FINISH.
5 WELD SYMBOLS TO BS 499.
6 DATUM DIMENSIONS.
7 METRIC THREADS TO BS 3643/DIN 13.
8 UNIFIED THREADS TO BS 1580.

ASSOC SPECS.	BS EN 60529		
MATERIAL		DRAWN M. HOLDER	DATE 19-01-12
HEAT TREATMENT		CHECKED	DATE 29/02/12
FINISH		APPROVED SPECIALIST JPH	DATE 29/02/12
FORM		APPROVED FOR ISSUE JPH	DATE 29/02/12

TITLE
EB+ GEN 3
3M LINK CABLE
SCALE WAS -
NTS SHEET 1 OF 1

HALDEX BRAKE PRODUCTS LTD
MOONS MOAT DRIVE,
MOONS MOAT NORTH,
REDDITCH, WORCS.
B98 9HA
Haldex
PART No.
814 041 000 2
A3