


PART No.
814 012 200 2

COMPUTER PRODUCED DRAWING
MUST NOT BE CHANGED MANUALLY

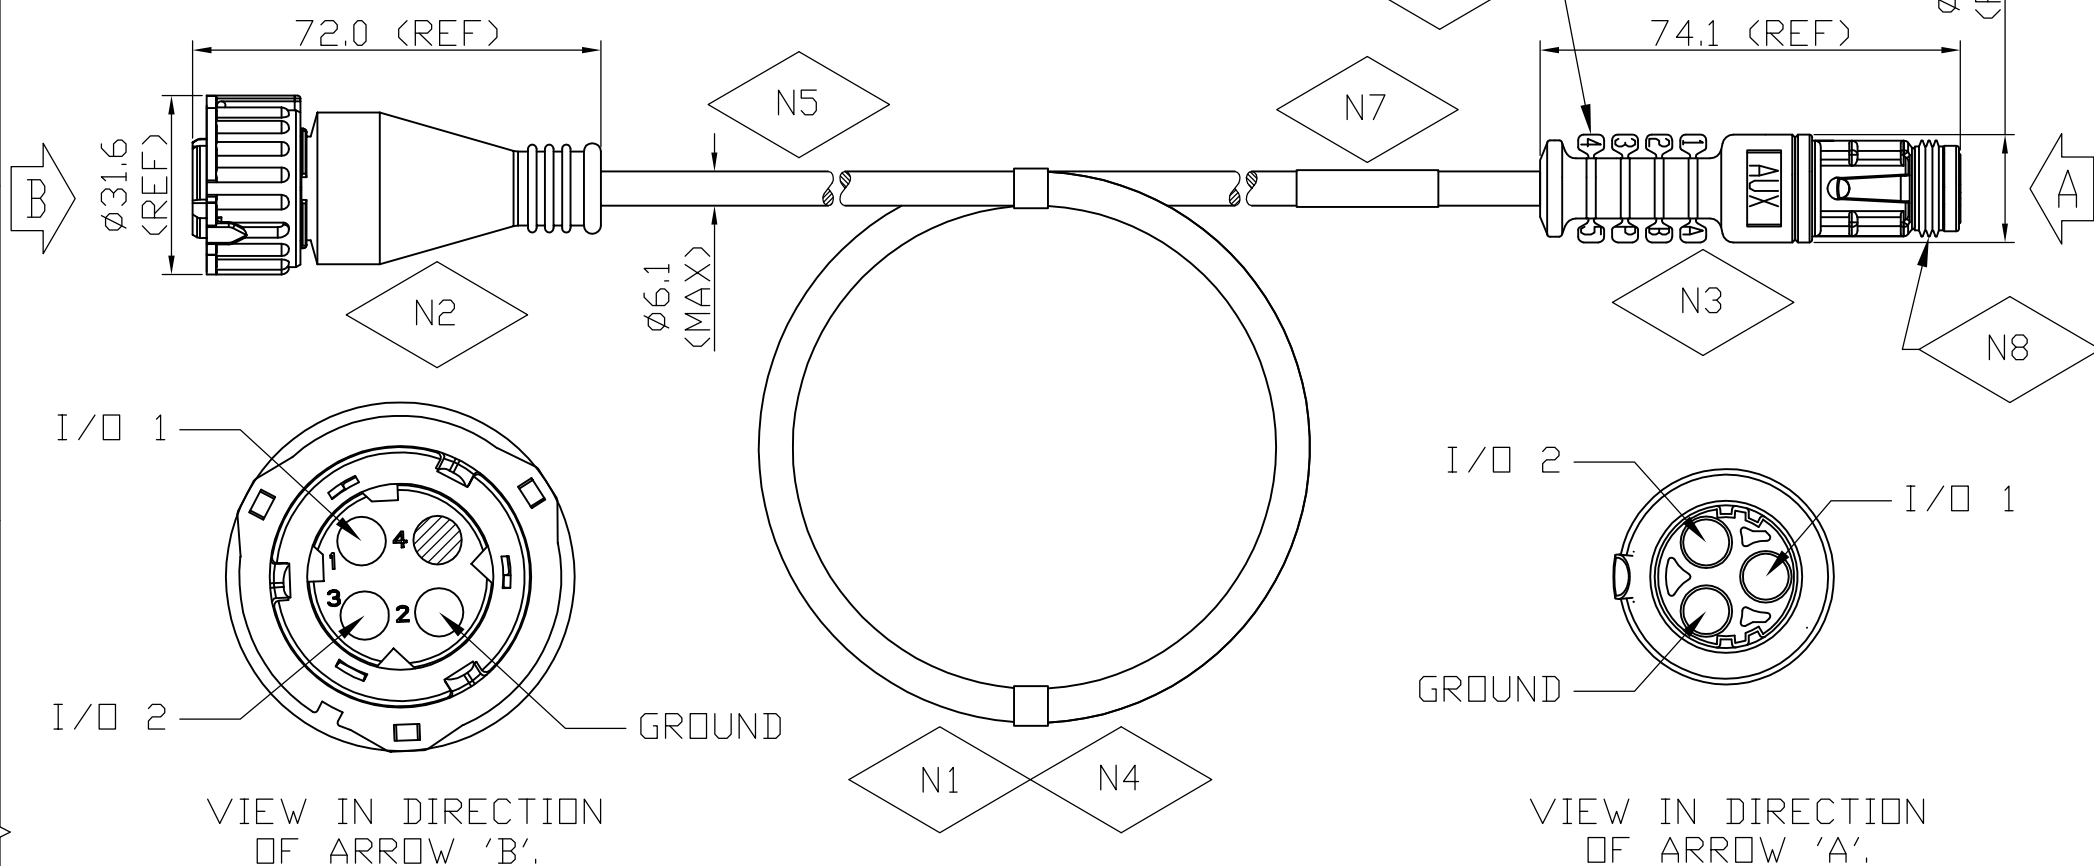

- N 1 SEE CHART FOR CABLE ASSEMBLY PART NUMBER.
- N 2 CONFORMS TO IP67 (BS EN 60529) WHEN MATED WITH PLUG DIN 72585 (ISO 15170) STYLE CONNECTORS.
- N 3 CONFORMS TO IP67 (BS EN 60529) WHEN MATED WITH EB+ ECU / Y-SPLITTER.
- N 4 CABLE IS SUPPLIED COILED IN A PLASTIC BAG.
- N 5 CABLE INSULATION MATERIAL - PVC WIRE CORE CROSS SECTIONAL AREA - 0.75mm².
- N 6 REFER TO INSTALLATION / SERVICE MANUAL FOR TAG REMOVAL.
- N 7 PART NUMBER IDENTIFICATION.
- N 8 SEAL TO BE PROTECTED FROM DAMAGE PRIOR TO ASSEMBLY.

ASSY. No.	CUT LENGTH (MIN)
814 012 201	7m
814 012 211	18m
814 012 221	1m
814 012 231	2m
814 012 241	5m
814 012 251	3m

ASSY. No.	CUT LENGTH (MIN)
814 012 261	4m
814 012 271	10m

K **T** **M** THIS DRAWING/SPECIFICATION USES CLASSIFIED CHARACTERISTIC SYMBOLS DEFINED IN QUALITY PROCEDURE 4.17

ISS	CHANGE	CHEC	DATE	ISS	CHANGE	CHEC	DATE
2	C6193	MPH	23-01-12				
1	PR2090	MPH	11-07-11				

AutoCAD PART
THIS DRAWING/DOCUMENT IS COPYRIGHT AND THE PROPERTY OF HALDEX BRAKE PRODUCTS LIMITED. IT MUST NOT BE COPIED (IN WHOLE OR IN PART) USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY. ANY COPIES OF THIS DRAWING/DOCUMENT MADE BY ANY METHOD MUST ALSO INCLUDE A COPY OF THIS LEGEND. © 2011

NOTE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES
 1 ISO METHOD A PROJECTION.
 2 S.I. UNITS.
 3 SURFACE FINISH TO BS 308/BS 1134.
 4 DIMS. APPLY AFTER CHEMICAL OR ELECTRO-PLATED FINISH.
 5 WELD SYMBOLS TO BS 499.
 6 DATUM DIMENSIONS.
 7 METRIC THREADS TO BS 3643/DIN 13.
 8 UNIFIED THREADS TO BS 1580.

ASSOC SPECS.	BS EN 60529				
MATERIAL		DRAWN	M. HOLDER	DATE	11-07-11
HEAT TREATMENT		CHECKED		DATE	26/01/12
FINISH		APPROVED SPECIALIST	JPH	DATE	26/01/12
FORM		APPROVED FOR ISSUE	JPH	DATE	26/01/12

TITLE
EB+ AUXILIARY CABLE
(DIN 72585 CONNECTOR)
SCALE NTS
WAS -
SHEET 1 OF 1

HALDEX BRAKE PRODUCTS LTD
MOONS MOAT DRIVE,
MOONS MOAT NORTH,
REDDITCH, WORCS.
B98 9HA
Haldex
PART No.
814 012 200 2
A3