


PART No.  
814 033 000 2

COMPUTER PRODUCED DRAWING  
MUST NOT BE CHANGED MANUALLY

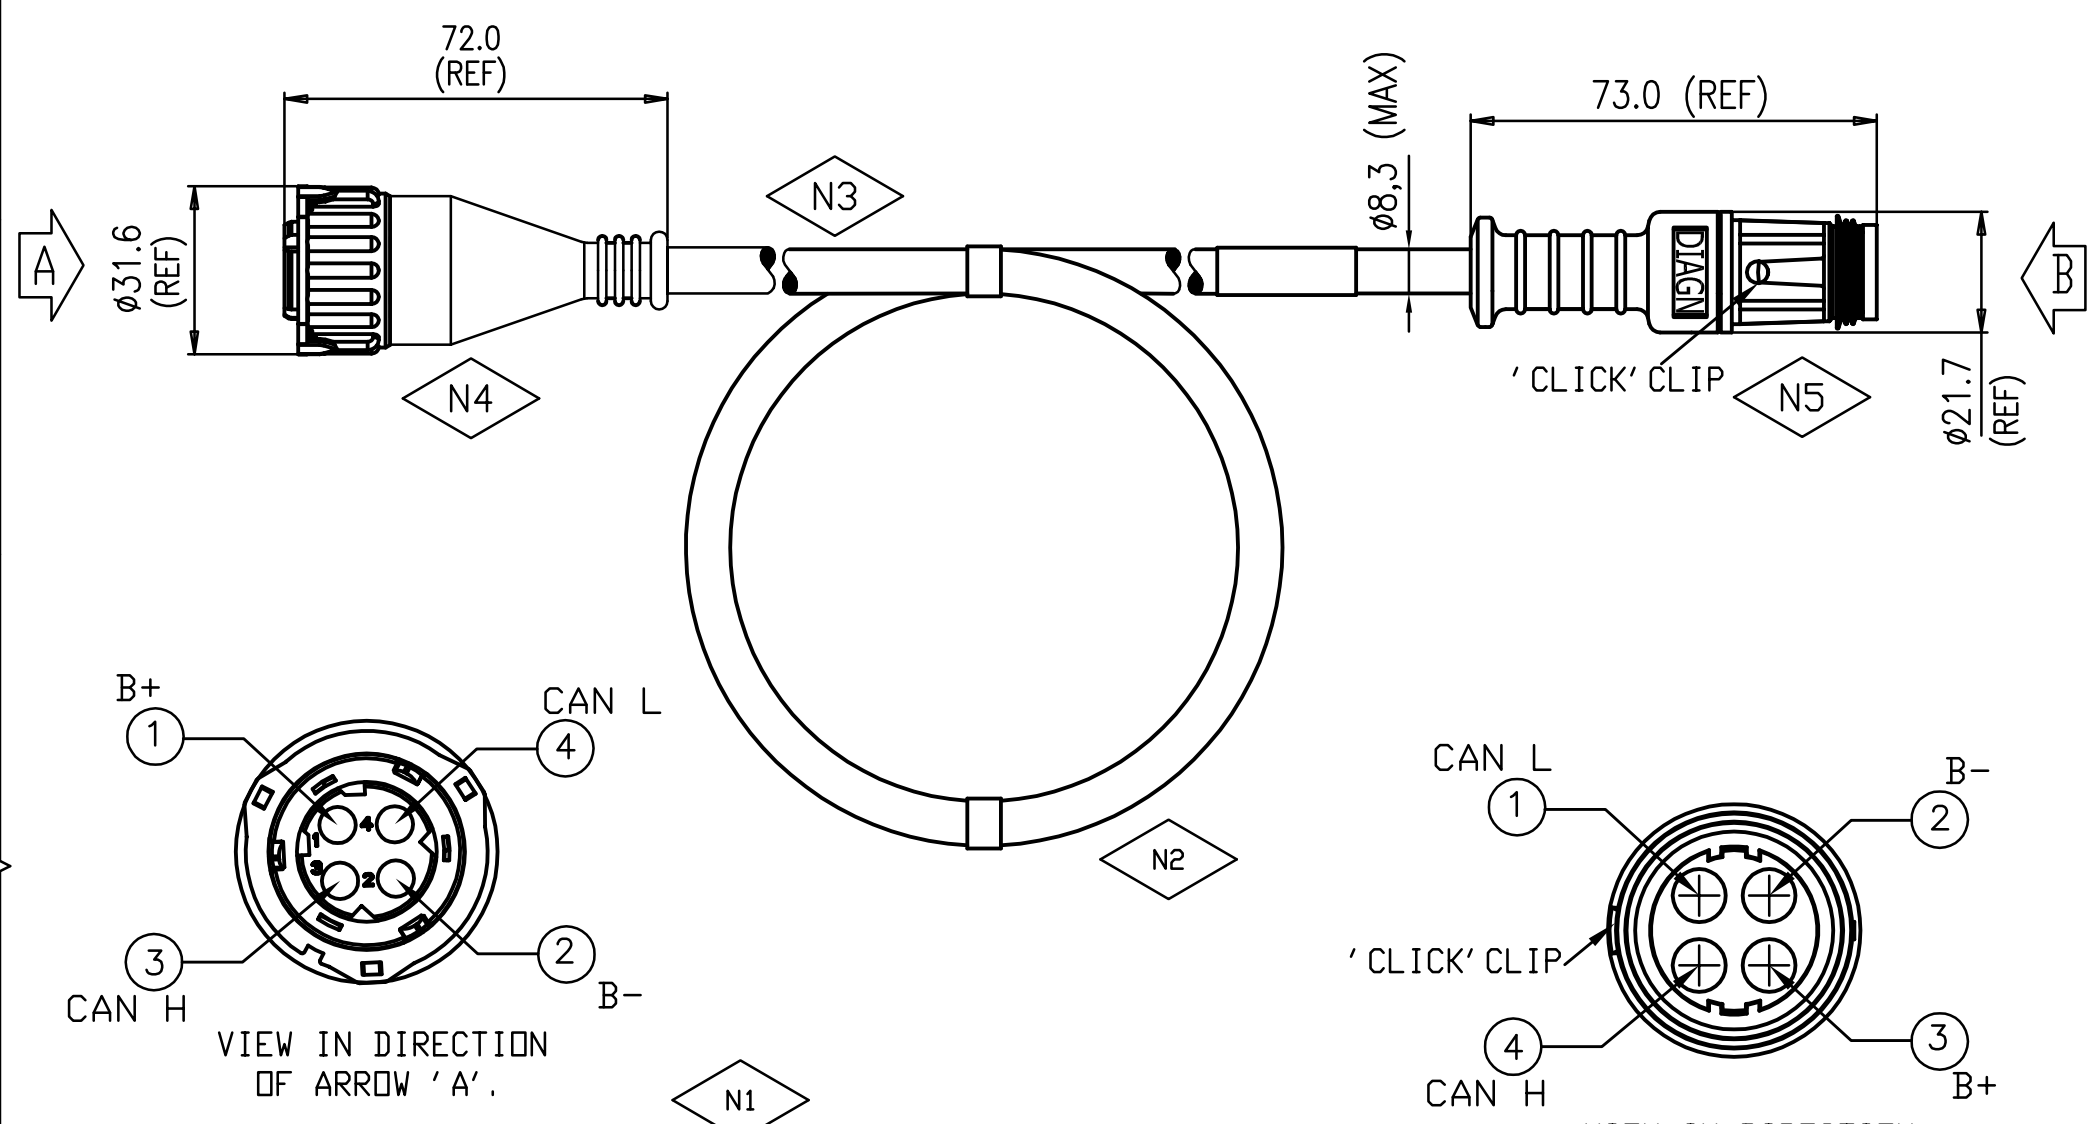

- N 1 SEE CHART 'A' FOR CABLE ASSEMBLY PART NUMBER.
- N 2 CABLE IS SUPPLIED COILED IN A PLASTIC BAG
- N 3 CABLE INSULATION MATERIAL - PVC WIRE CORE CROSS SECTIONAL AREA - 0.75mm<sup>2</sup>
- N 4 CONFORMS TO IP67 (BS EN 60529) WHEN MATED WITH PLUG DIN 72585 (ISO 15170) STYLE CONNECTORS
- N 5 CONFORMS TO IP67 (BS EN 60529) WHEN MATED WITH EB+/Y-SPLITTER CABLE

**K** **M**  
**T** THIS DRAWING/SPECIFICATION USES CLASSIFIED CHARACTERISTIC SYMBOLS DEFINED IN QUALITY PROCEDURE 4.17

CHART A	
ASSY. No.	CUT LENGTH
814 033 001	1 M
814 033 011	12 M

1	PR2090	GIL	07.09.11				
ISS	CHANGE	CHEC	DATE	ISS	CHANGE	CHEC	DATE

AutoCAD PART  
THIS DRAWING/DOCUMENT IS COPYRIGHT AND THE PROPERTY OF HALDEX BRAKE PRODUCTS LIMITED. IT MUST NOT BE COPIED (IN WHOLE OR IN PART) USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY. ANY COPIES OF THIS DRAWING/DOCUMENT MADE BY ANY METHOD MUST ALSO INCLUDE A COPY OF THIS LEGEND. © 2011

NOTE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES  
1 ISO METHOD A  $\phi$  PROJECTION.  
2 S.I. UNITS.  
3 SURFACE FINISH TO BS 308/BS 1134.  
4 DIMS. APPLY AFTER CHEMICAL OR ELECTRO-PLATED FINISH.  
5 WELD SYMBOLS TO BS 499.  
6 D DATUM DIMENSIONS.  
7 METRIC THREADS TO BS 3643/DIN 13.  
8 UNIFIED THREADS TO BS 1580.

ASSOC SPECS.			
MATERIAL	DRAWN	DATE	
HEAT TREATMENT	G LEDINGHAM	01.07.11	
FINISH	CHECKED	DATE	
FORM	27/10/11		
	APPROVED SPECIALIST	JPH	DATE
	27/10/11		
	APPROVED FOR ISSUE	JPH	DATE
	27/10/11		

TITLE  
EB+ DIN TO 4 POLE AUX  
CABLE ASSEMBLY  
CHART  
SCALE  
NTS  
SHEET 1 OF 1

HALDEX BRAKE PRODUCTS LTD  
MOONS MOAT DRIVE,  
REDDITCH, WORCS.  
B98 9HA  
**Haldex**  
PART No.  
814 033 000 2  
A3