


PART No.  
814 037 000 2

COMPUTER PRODUCED DRAWING  
MUST NOT BE CHANGED MANUALLY

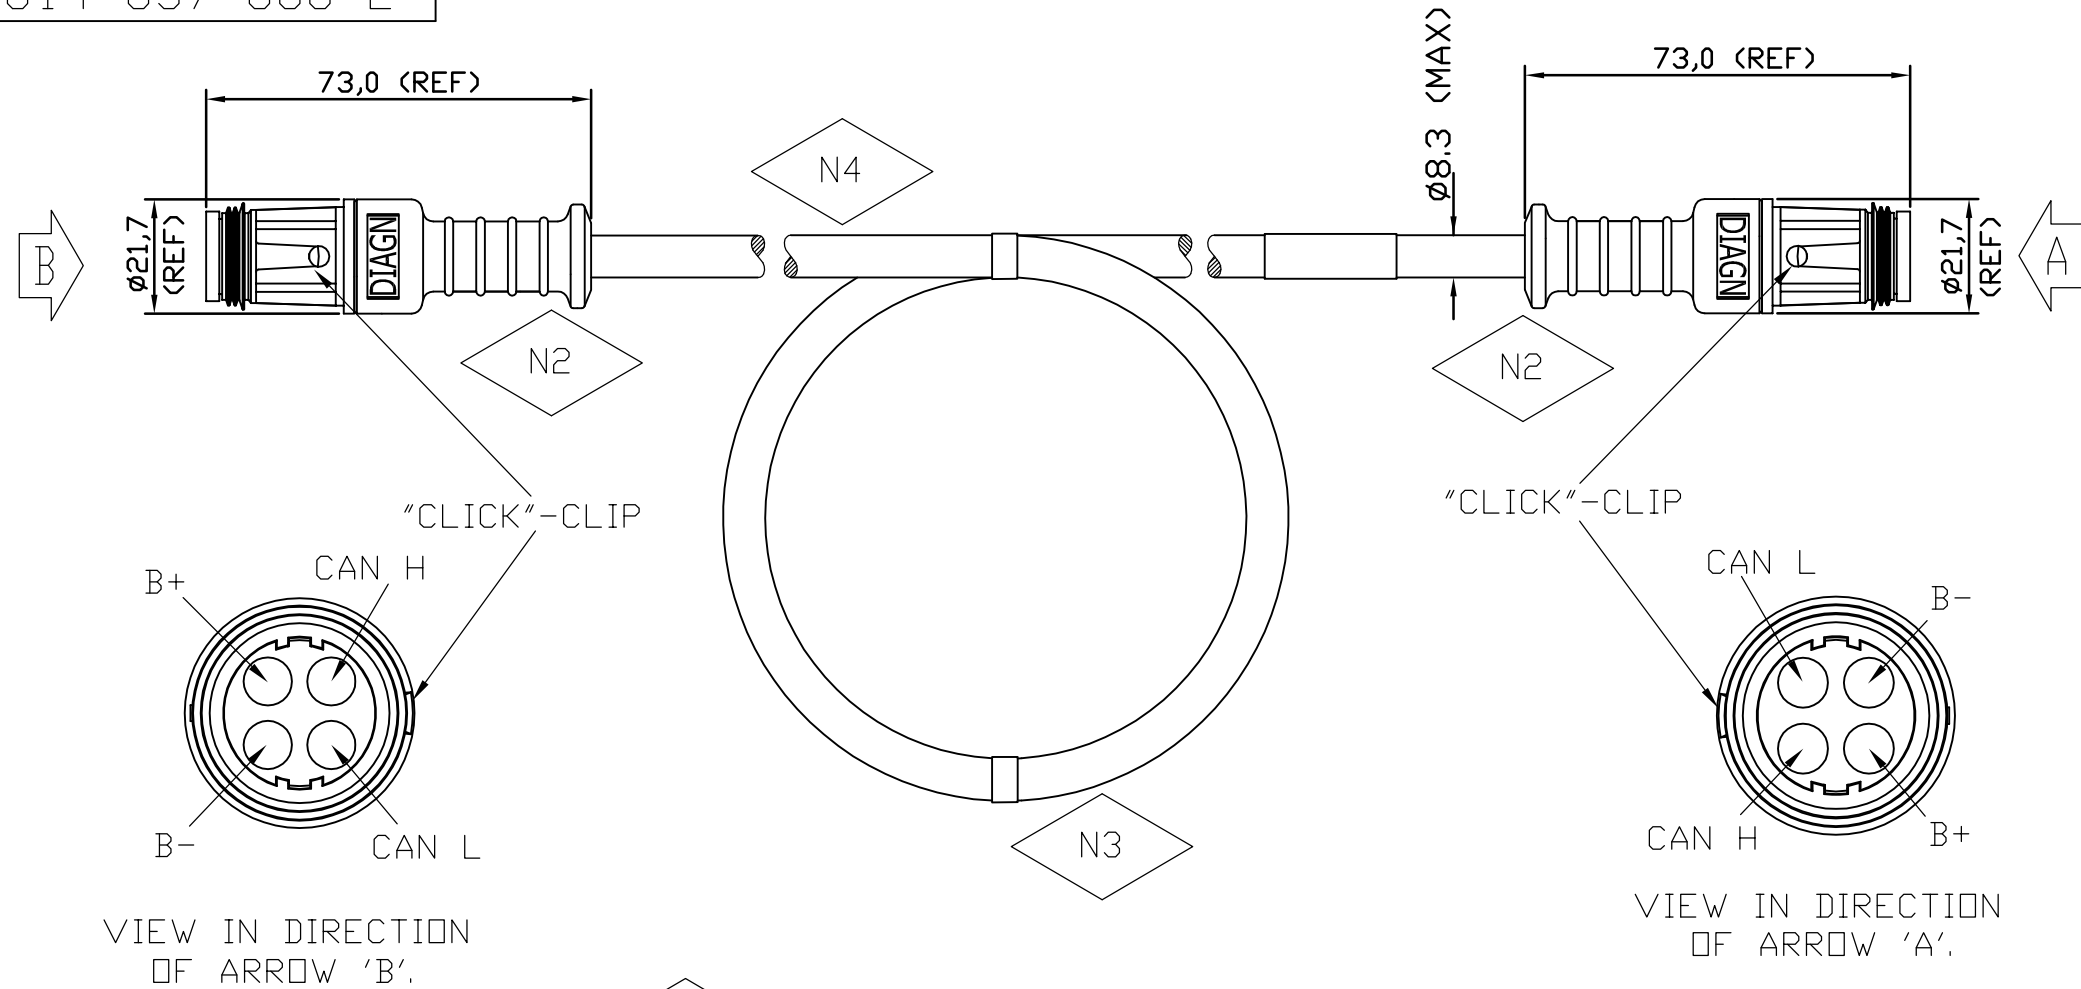

- N 1 SEE CHART 'A' FOR CABLE ASSEMBLY PART NUMBER.
- N 2 CONFORMS TO IP67 (BS EN 60529) WHEN MATED WITH EB+ ECU/INFO CENTRE2/Y-SPLITTER.
- N 3 CABLE IS SUPPLIED COILED IN A PLASTIC BAG
- N 4 CABLE INSULATION MATERIAL - PVC WIRE CORE CROSS SECTIONAL AREA - 0.75mm<sup>2</sup>

**K** **M**  
**T** THIS DRAWING/SPECIFICATION USES CLASSIFIED CHARACTERISTIC SYMBOLS DEFINED IN QUALITY PROCEDURE 4.17

N1 CHART 'A'

ASSY. No.	CUT LENGTH (MIN)
814 037 001	6.5m
814 037 011	0.5m
814 037 021	8.0m
814 037 031	14.0m
814 037 041	2.5m

ASSY. No.	CUT LENGTH (MIN)
814 037 051	1.0m

ISS	CHANGE	CHEC	DATE	ISS	CHANGE	CHEC	DATE
4	C6783	MPH	11.02.16				
3	C6547	MPH	27.03.14				
2	C6218	MPH	19.04.12				
1	PR2090	GIL	05.07.11				

AutoCAD PART  
THIS DRAWING/DOCUMENT IS COPYRIGHT AND THE PROPERTY OF HALDEX BRAKE PRODUCTS LIMITED. IT MUST NOT BE COPIED (IN WHOLE OR IN PART) USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY. ANY COPIES OF THIS DRAWING/DOCUMENT MADE BY ANY METHOD MUST ALSO INCLUDE A COPY OF THIS LEGEND. © 2011

NOTE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES  
1 ISO METHOD A PROJECTION.  
2 DIMENSIONS IN mm.  
3 SURFACE FINISH TO BS 308/BS 1134.  
4 DIMS. APPLY AFTER CHEMICAL OR ELECTRO-PLATED FINISH.  
5 WELD SYMBOLS TO BS 499.  
6 DATUM DIMENSIONS.  
7 METRIC THREADS TO BS 3643/DIN 13.  
8 UNIFIED THREADS TO BS 1580.

ASSOC SPECS.			
MATERIAL	DRAWN	G LEDINGHAM	DATE 01-07-11
HEAT TREATMENT	CHECKED		DATE 12/02/2016
FINISH	APPROVED SPECIALIST		DATE
FORM	APPROVED FOR ISSUE		DATE 12/02/2016

TITLE  
4 POLE AUXILIARY TO  
4 POLE AUXILIARY  
CABLE ASSEMBLY CHART  
SCALE NTS  
WAS -  
SHEET OF

HALDEX BRAKE PRODUCTS LTD  
MIRA TECHNOLOGY PARK  
LINDLEY  
WARWICKSHIRE  
CV13 6DE  
**HalDEX**  
PART No.  
814 037 000 2  
A3