



PART No. 814 038 100 2

COMPUTER PRODUCED DRAWING
MUST NOT BE CHANGED MANUALLY

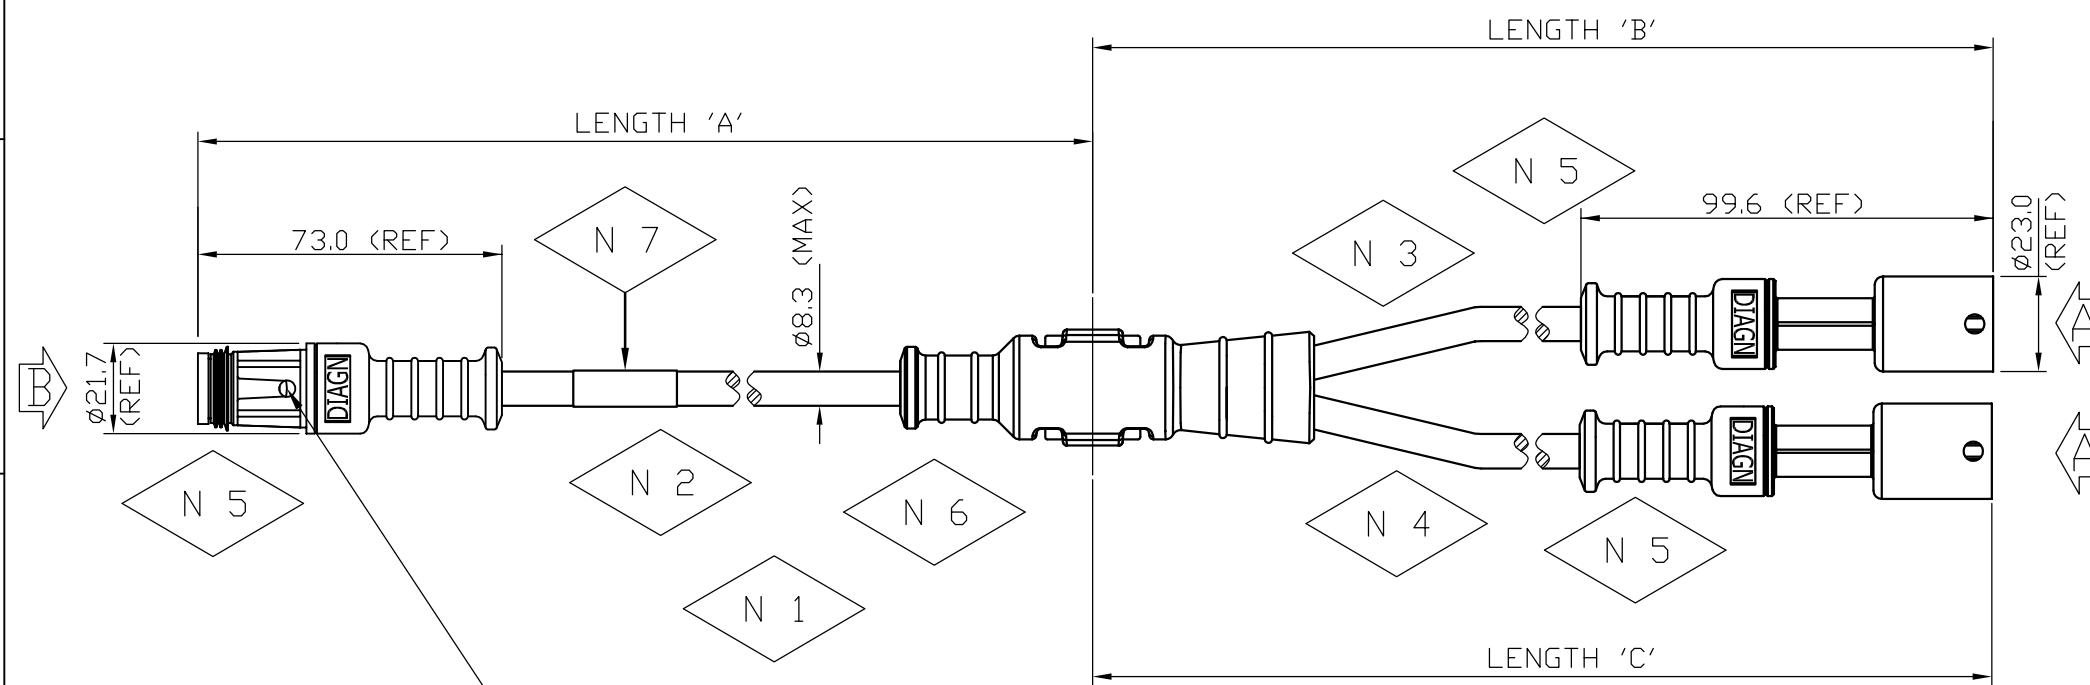


- N 1 CABLE IS SUPPLIED IN A PLASTIC BAG
- N 2 CABLE A - INSULATION MATERIAL - PVC
WIRE CROSS SECTIONAL AREA - 0.75mm²
- N 3 CABLE B - INSULATION MATERIAL - PVC
WIRE CROSS SECTIONAL AREA - 0.75mm²
- N 4 CABLE C - INSULATION MATERIAL - PVC
WIRE CROSS SECTIONAL AREA - 0.75mm²
- N 5 CONFORMS TO IP67 (BS EN 60529) WHEN MATED WITH 4 POLE AUXILIARY STYLE PLUGS/SOCKETS
- N 6 CONFORMS TO IP67 (BS EN 60529)
- N 7 PART NUMBER IDENTIFICATION

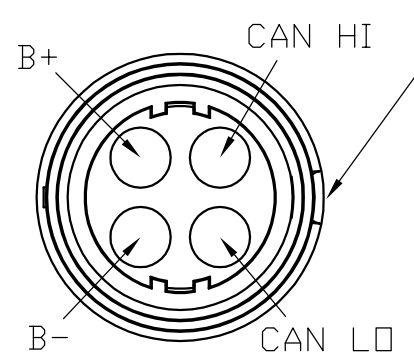

VIEW ON ARROW 'B'

PART NO	CABLE LENGTHS (MIN)		
	'A'	'B'	'C'
814 038 101	0.25m	0.25m	0.25m

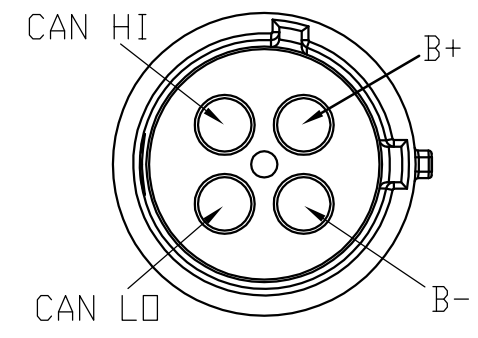

VIEW ON ARROW 'A'

K **M**
T THIS DRAWING/SPECIFICATION USES CLASSIFIED CHARACTERISTIC SYMBOLS DEFINED IN QUALITY PROCEDURE 4.17

ISS	CHANGE	CHEC	DATE	ISS	CHANGE	CHEC	DATE
1	PR2156_12	MPH	03/05/16				

AutoCAD PART
THIS DRAWING/DOCUMENT IS COPYRIGHT AND THE PROPERTY OF HALDEX BRAKE PRODUCTS LIMITED. IT MUST NOT BE COPIED (IN WHOLE OR IN PART) USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY. ANY COPIES OF THIS DRAWING/DOCUMENT MADE BY ANY METHOD MUST ALSO INCLUDE A COPY OF THIS LEGEND. © 2016

NOTE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES
1 ISO METHOD A ϕ PROJECTION.
2 S.I. UNITS.
3 SURFACE FINISH TO BS 308/BS 1134.
4 DIMS. APPLY AFTER CHEMICAL OR ELECTRO-PLATED FINISH.
5 WELD SYMBOLS TO BS 499.
6 D DATUM DIMENSIONS.
7 METRIC THREADS TO BS 3643/DIN 13.
8 UNIFIED THREADS TO BS 1580.

ASSOC SPECS.	BS EN 60529				
MATERIAL		DRAWN	M. HOLDER	DATE	03/05/16
HEAT TREATMENT		CHECKED	<i>MPH</i>	DATE	04/05/16
FINISH		APPROVED SPECIALIST	<i>M. Holder</i>	DATE	04/05/16
FORM		APPROVED FOR ISSUE	<i>MPH</i>	DATE	04/05/16

TITLE
M/F/F Y-SPLITTER
CABLE ASSY
4x4x4 WAY
SCALE NTS
WAS -
SHEET 1 OF 1

HALDEX BRAKE PRODUCTS LTD
MIRA TECHNOLOGY PARK,
LINDLEY,
WARKS.
CV13 6DE
PART No.
814 038 100 2
A3

