


PART No. **364\_607\_000\_2**

**COMPUTER PRODUCED DRAWING  
MUST NOT BE CHANGED MANUALLY**

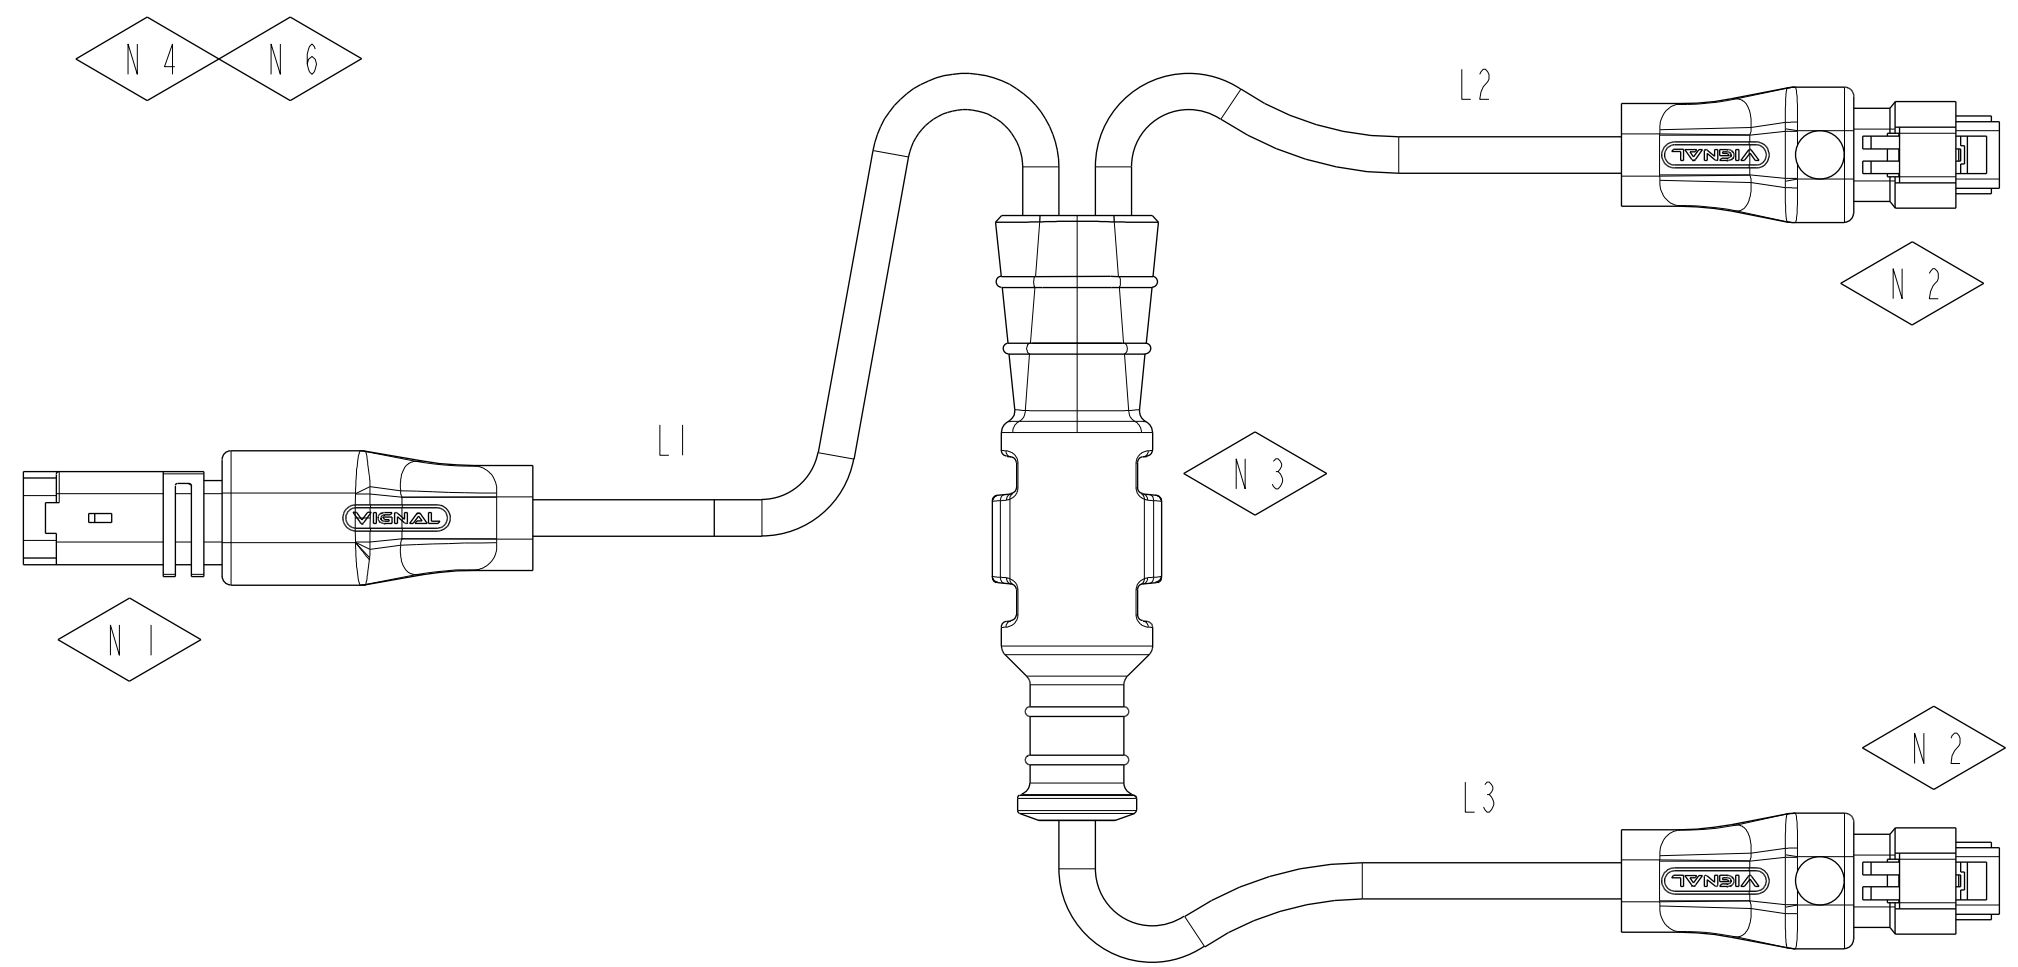

- N 1 CONFORMS TO IP54 RATING (BS EN 60529) WHEN MATED TO SENSOR LOOM / Y-SPLITTER.
- N 2 CONFORMS TO IP54 RATING (BS EN 60529) WHEN MATED TO SENSOR/Y-SPLITTER.
- N 3 CONFORMS TO IP67 RATING (BS EN 60529).
- N 4 THIS PRODUCT IS FULLY COMPLIANT WITH ADR.
- N 5 -
- N 6 FOR INSTALLATION INSTRUCTIONS REFER TO THE LATEST VERSION OF DOCUMENT 006 300 035 ON INDEX.

PART NUMBER	MINIMUM CABLE LENGTH		
	L1	L2	L3
364 607 001	0.5m	0.5m	0.5m

**THIS DRAWING/SPECIFICATION USES CLASSIFIED CHARACTERISTIC SYMBOLS DEFINED IN QUALITY PROCEDURE 4.17**

**TO VIEW CHANGE INFORMATION, ACCESS THE ENGINEERING DOCUMENT DATABASE (EDD) & INPUT THE RELEVANT NUMBER BELOW. EXAMPLE 'C6500'.**

ISS	CHANGE	CHEC	DATE	ISS	CHANGE	CHEC	DATE
2	C6594	MPH	29/09/14				
1	PR2151_5	MPH	24/07/14				

THIS DRAWING/DOCUMENT IS COPYRIGHT AND THE PROPERTY OF HALDEX BRAKE PRODUCTS LIMITED. IT MUST NOT BE COPIED (IN WHOLE OR IN PART) USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY. ANY COPIES OF THIS DRAWING/DOCUMENT MADE BY ANY METHOD MUST ALSO INCLUDE A COPY OF THIS LEGEND. © 2014

NOTE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES

- ISO METHOD A PROJECTION.
- S.I. UNITS.
- SURFACE FINISH TO BS 308/BS 1134.
- DIMS. APPLY AFTER CHEMICAL OR ELECTRO-PLATED FINISH.
- WELD SYMBOLS TO BS 499.
- D DATUM DIMENSIONS.
- METRIC THREADS TO BS 3643/DIN 13.
- UNIFIED THREADS TO BS 1580.

PRO ENGINEER PART

ASSOC SPECS.	BS EN 60529		
MATERIAL		MODEL:	DATE:
HEAT TREATMENT		DRAWN: M. HOLDER	DATE: 21/07/14
FINISH		CHECKED:	DATE: 30/09/14
FORM		APPROVED SPECIALIST:	DATE: 30/09/14
		APPROVED FOR ISSUE	DATE: 30/09/14

TITLE  
**Y-SPLITTER  
EB+ SOFT DOCKING**

SCALE  
NTS

WAS  
-

SHEET 1 OF 1

HALDEX BRAKE PRODUCTS LTD  
MIRA TECHNOLOGY PARK,  
LINDLEY,  
WARWICKSHIRE,  
CV13 6DE

**Haldex**

PART No. **364\_607\_000\_2**

A3