

Brake Shoe Program

MIDLAND™
Vital Needs. Quality Parts. Single Source.




Value and performance in commercial vehicle drum brakes.

Midland Brake Shoes

- NEW steel – No core
- OE grade hardware kits
- Heat treated roller and anchor ends
- 23K non-asbestos organic friction material
- Level N (2025) copper content compliant
- E-Coat for corrosion protection



Midland Part #	Order Quantities
MID4515QP50	• Pallet quantities only; varies by part number. • Part number suffix denotes pallet quantity. • Trailer load pricing available - Contact your SAF-HOLLAND/Haldex Territory Manager for inquiries.
MID4707QP50	
MID4709ES2P50	
MID1308EP40	
MID1443EP40	
MID4702QP40	
MID4719ES2P50	
MID4720QP50	
MID4711P40	

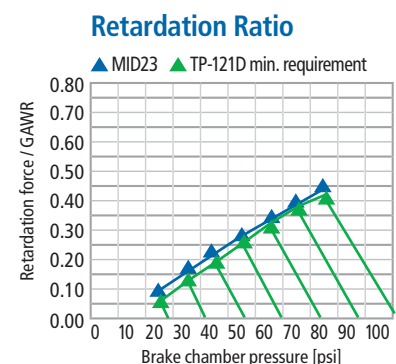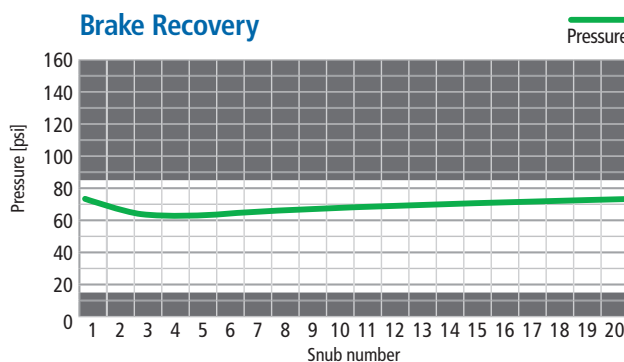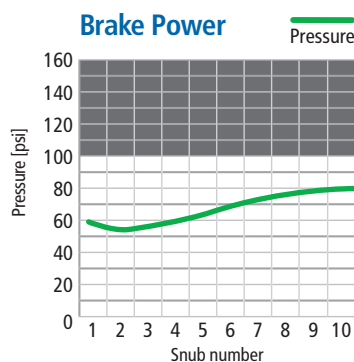

MID23 Technical Stats		
Brake size: 16.5 x 7 S-Cam	AL factor: 165	Friction average: Normal .410 Hot .400 Coefficient - FF
Axle load: 23,000 lb.	Suggested AL factor: 144 – 180	
Rolling radius: 19.6		

Haldex Brake Lining Options				
Axle load	Economy	Good	Better	Best
20,000 lb.	HV77	GN	GF	GR
23,000 lb.	MID23	HV88	GD	GG

You can trust in **Midland Quality Parts** to meet your vital needs with single-source convenience.

To learn more about the Midland line of products from Haldex, please visit haldex.com



XL-BP20010AL-en-US Rev C 0126
Printed in the USA
Midland is a Haldex brand