


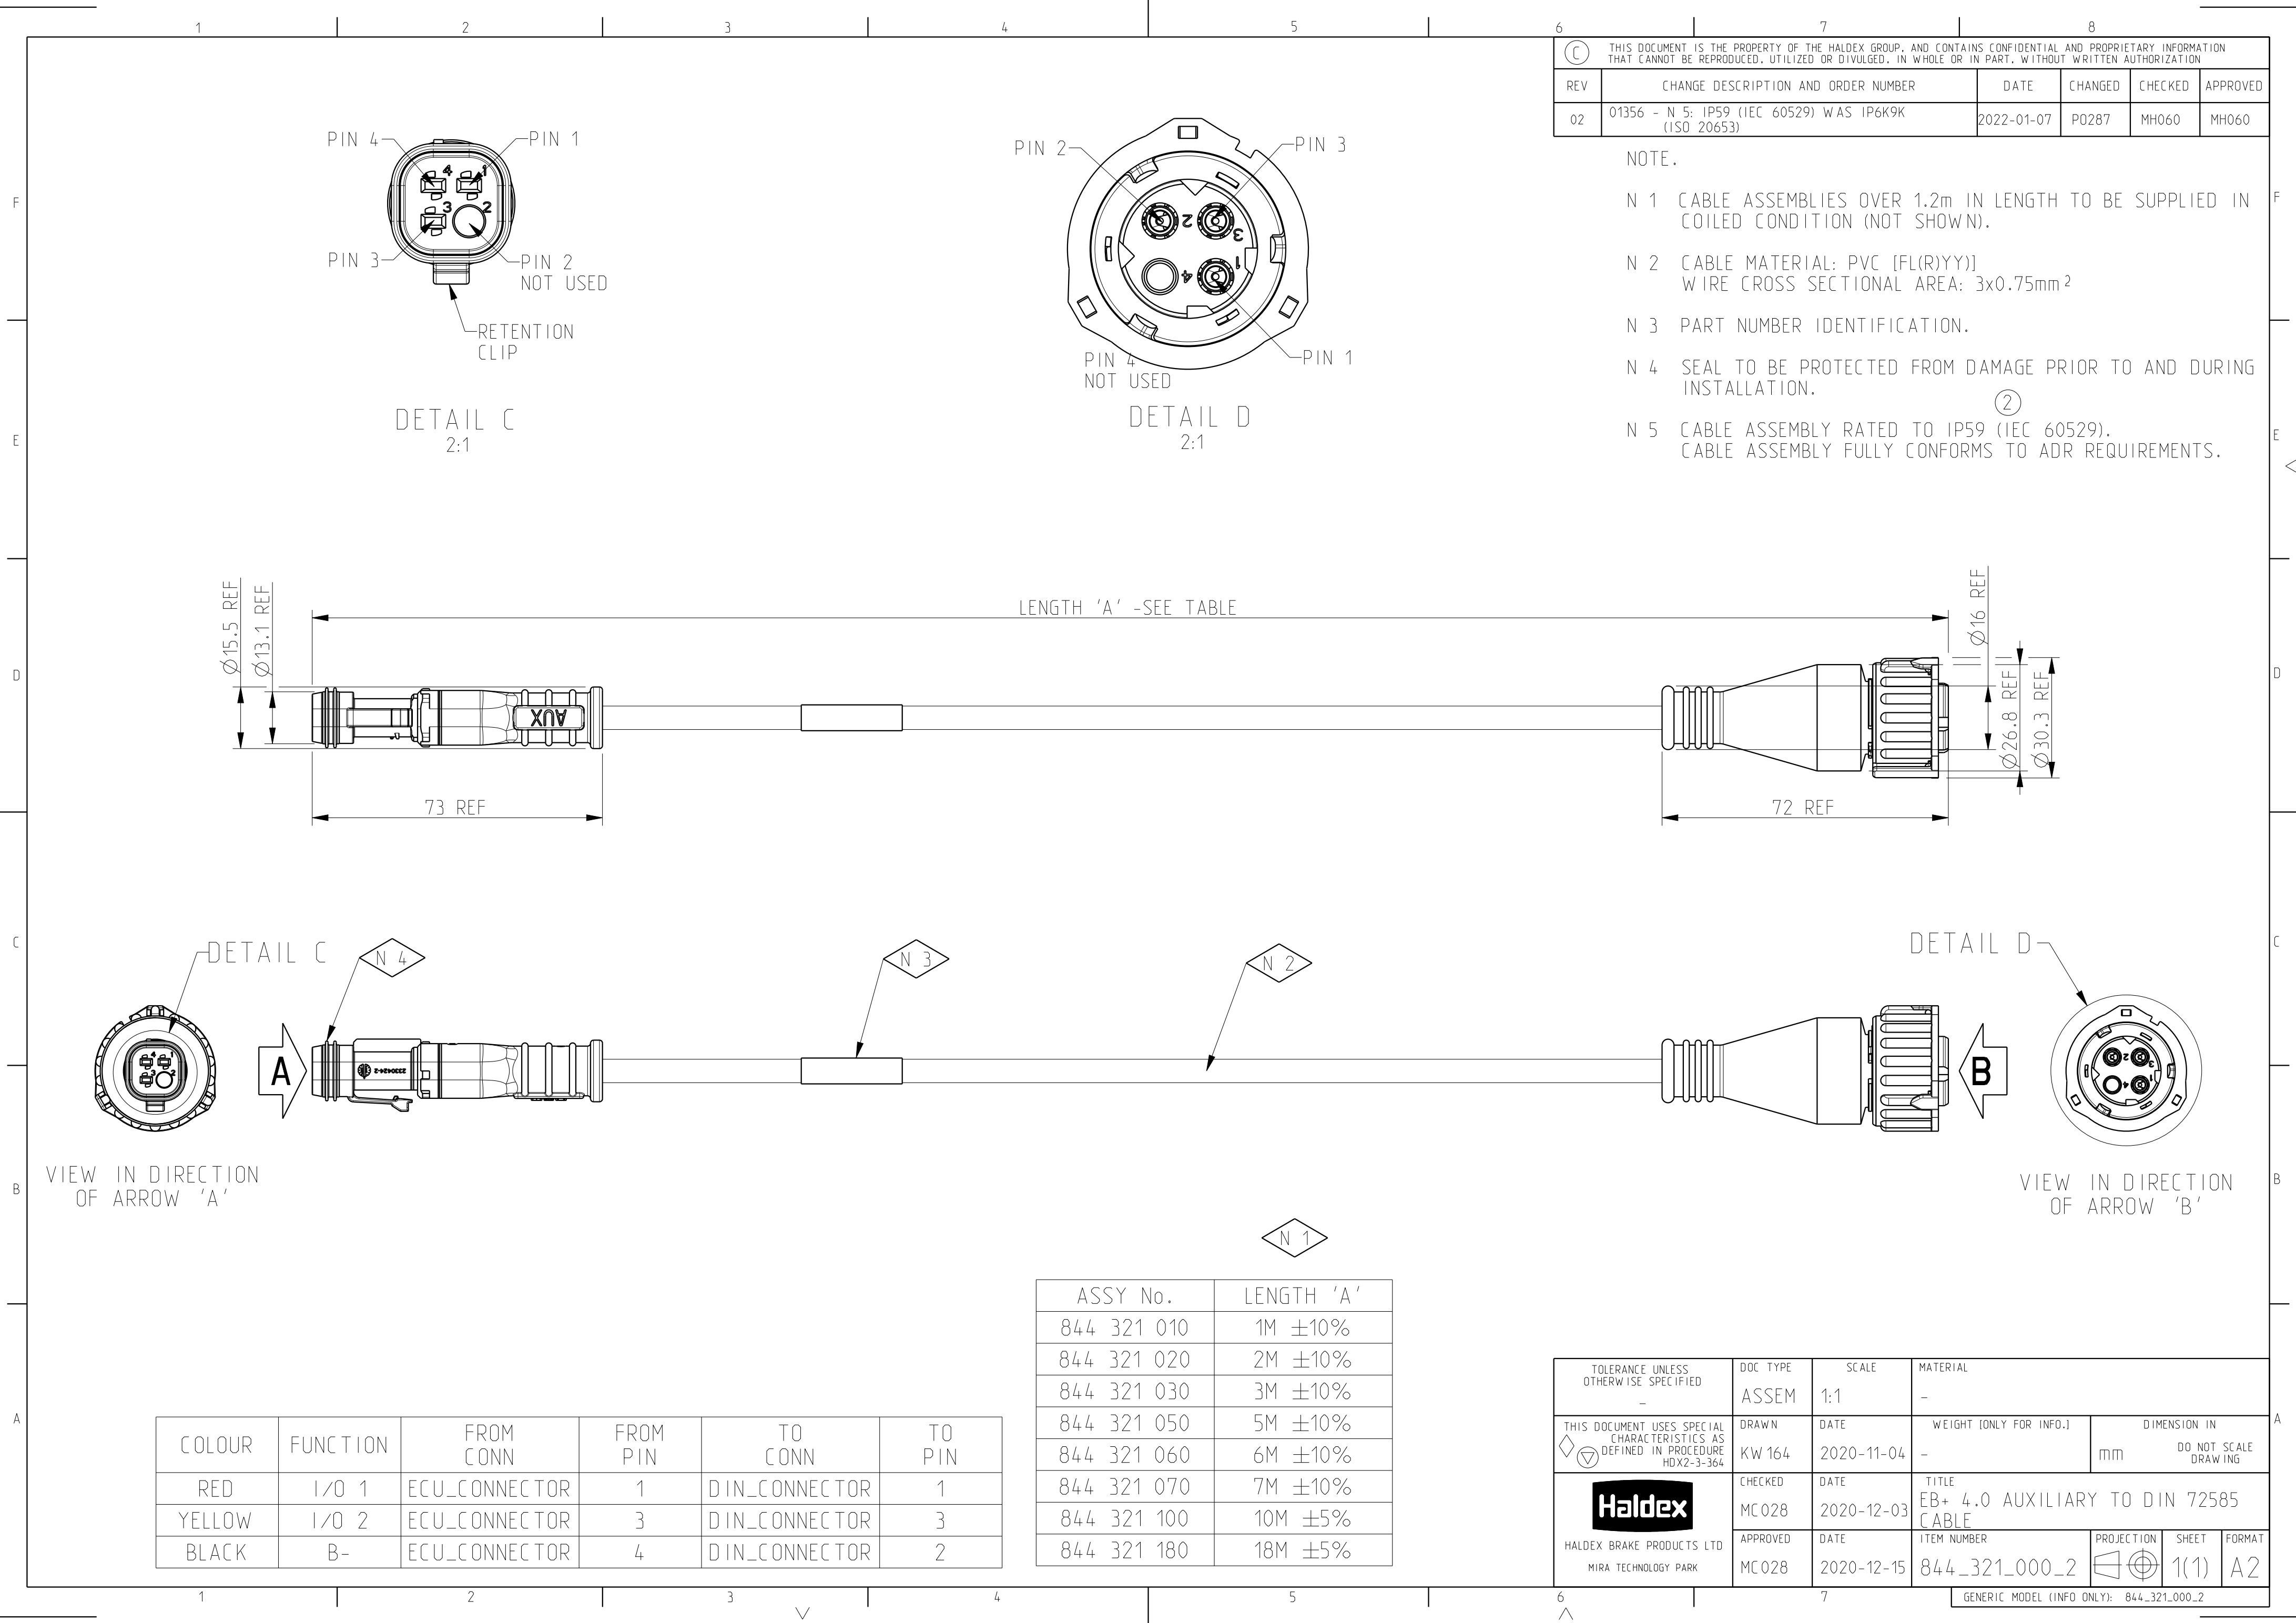

C THIS DOCUMENT IS THE PROPERTY OF THE HALDEX GROUP, AND CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED, UTILIZED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION							
REV	CHANGE DESCRIPTION AND ORDER NUMBER			DATE	CHANGED	CHECKED	APPROVED
02	01356 - N 5: IP59 (IEC 60529) WAS IP6K9K (ISO 20653)			2022-01-07	P0287	MH060	MH060

- NOTE.
- N 1 CABLE ASSEMBLIES OVER 1.2m IN LENGTH TO BE SUPPLIED IN COILED CONDITION (NOT SHOWN).
- N 2 CABLE MATERIAL: PVC [FL(R)YY]
WIRE CROSS SECTIONAL AREA: 3x0.75mm²
- N 3 PART NUMBER IDENTIFICATION.
- N 4 SEAL TO BE PROTECTED FROM DAMAGE PRIOR TO AND DURING INSTALLATION.
- N 5 CABLE ASSEMBLY RATED TO IP59 (IEC 60529).
CABLE ASSEMBLY FULLY CONFORMS TO ADR REQUIREMENTS.

COLOUR	FUNCTION	FROM CONN	FROM PIN	TO CONN	TO PIN
RED	I/O 1	ECU_CONNECTOR	1	DIN_CONNECTOR	1
YELLOW	I/O 2	ECU_CONNECTOR	3	DIN_CONNECTOR	3
BLACK	B-	ECU_CONNECTOR	4	DIN_CONNECTOR	2

ASSY No.	LENGTH 'A'
844 321 010	1M ±10%
844 321 020	2M ±10%
844 321 030	3M ±10%
844 321 050	5M ±10%
844 321 060	6M ±10%
844 321 070	7M ±10%
844 321 100	10M ±5%
844 321 180	18M ±5%

TOLERANCE UNLESS OTHERWISE SPECIFIED -	DOC TYPE ASSEM	SCALE 1:1	MATERIAL -		
THIS DOCUMENT USES SPECIAL CHARACTERISTICS AS DEFINED IN PROCEDURE HDX2-3-364	DRAWN KW 164	DATE 2020-11-04	WEIGHT [ONLY FOR INFO.] -		DIMENSION IN mm DO NOT SCALE DRAWING
	CHECKED MC028	DATE 2020-12-03	TITLE EB+ 4.0 AUXILIARY TO DIN 72585 CABLE		
HALDEX BRAKE PRODUCTS LTD MIRA TECHNOLOGY PARK	APPROVED MC028	DATE 2020-12-15	ITEM NUMBER 844_321_000_2	PROJECTION 	SHEET 1(1) FORMAT A2